# Conveyor system X300 – links and chains

Each link kit contains 10 links, 10 plastic pivots, and 10 stainless steel pins, unless otherwise specified. Material abbreviations: See page III.

## Plain chain

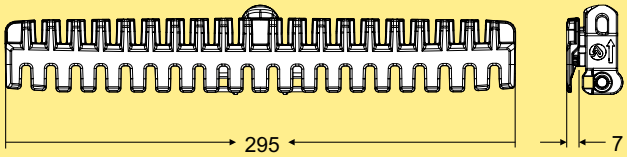


| Chain | Link(s) | Link kit(s) | Dimensions | Link weight | Material, link | Material, pivot |
|---|---|---|---|---|---|---|
| XBTP 3A300 K | FLX1002429 | FLX1003734 | W=295 mm | 73 g | POM B | See page III |
| XBTPX 3A300 K | FLX1002430 | FLX1003735 | W=295 mm | 73 g | POM A | See page III |

## Plain chain

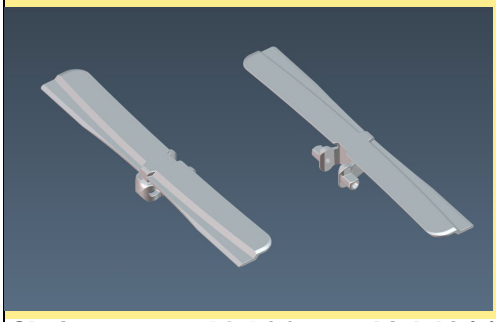

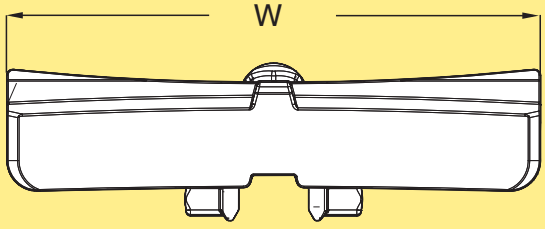





| Chain | Link(s) | Link kit(s) | Dimensions | Link weight | Material, link | Material, pivot |
|---|---|---|---|---|---|---|
| XBTP 3A295 | XBTL 295 | 5056652 | W=295 mm | 73 g | POM B | See page III |
| XBTP 3A295 E | 5122444 | n.a. | W=295 mm | 73 g | POM A COND | PA66 ISD |
| 5122891 | 5122445 | n.a. | W=295 mm | 73 g | POM A Blue | See page III |
| XBTPX 3A295 | XBTLX 295 | 5122928 | W=295 mm | 73 g | POM A | See page III |

## Friction top chain

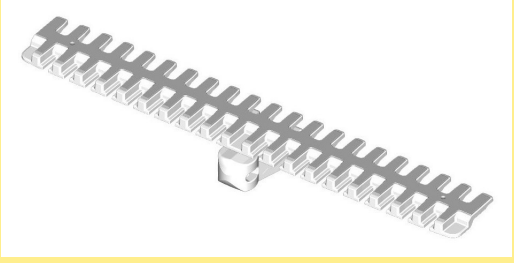

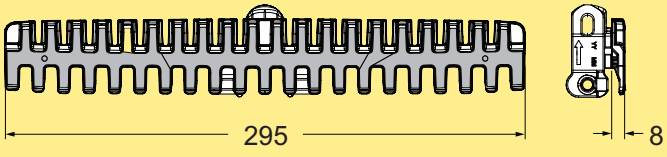


Friction insert is TPE. Note: Can not be combined as a PAR chain with similarly shaped plain links.

| Chain | Link kit(s) | Dimensions | Link weight | Material, link | Material, pivot |
|---|---|---|---|---|---|
| XBTPX 3A300 K FA | FLX1009392 | | 73 g | POM A | See page III |

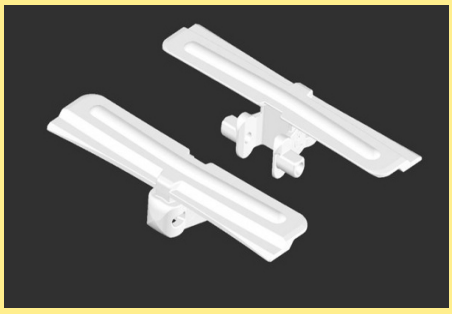

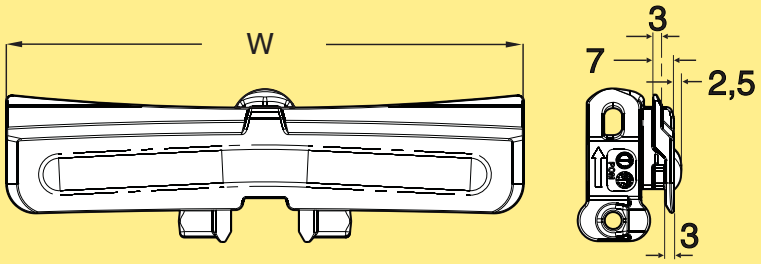


Friction insert is polyether-polyamide.

| Chain | Config. | Link(s) | Link kit(s) | Dimensions | Link weight | Material, link | Material, pivot |
|---|---|---|---|---|---|---|---|
| XBTP 3A295 F | - | XBTL 295 F | 5054874 | W=295 mm | 75 g | POM A | See page III |
| XBTP 3A295 FP | PAR 2-20 | XBTL 295 F<br>XBTL 295* | | W=295 mm | 75 g | POM A | See page III |

**Link type between main cleat links.*

 © FlexLink 2026