

Conveyor system WL526X – Links and belts



Modular belt, Radius flush grid, curve-running

The belt consists of plastic hinged links connected by plastic rods. The belt is woven together by links that are 102 mm, 124 mm, and 180 mm wide. The assembled belt forms a wide, flat, and tight conveyor surface. Five standard widths of belt can be delivered: 152 mm, 203 mm, 304 mm, 456 mm, and 608 mm.


Standard belt colour is white but blue belts can also be ordered.

Belts with polyamide pins are available for dry or semi-wet applications. In constant wet applications, belts with acetal pins must be used. This is due to the fact that polyamide pins will absorb water and swell in wet applications, and acetal pins will squeak in dry environments.


Flat top belt, straight running

The belt has a minimal number of seams and has open hinges that are easy to clean. The belt is white and is available with acetal pins for wet applications


Travel direction of the belts:



Radius flush grid



Flat top belt

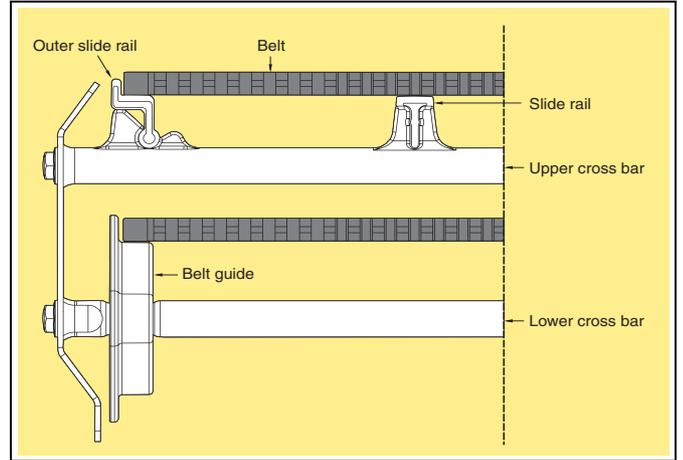

Technical characteristics

Belt width	456 mm
Modular belt weight (Acetal)	
Radius flush grid	3,43 kg/m
Flat top belt	3,22 kg/m
Modular belt height	
Radius flush grid	13 mm
Flat top belt	10 mm
Belt pitch	25,4 mm
Max. permissible belt tension	
Belt width 304	670 N
Belt width 456 and 608	1000 N
With bend	1000 N
Without bend	1200 N

Tools and accessories

The belt should be pretensioned with a return slack of about 25 mm. Too much belt slack is a safety risk as the belt can hang below the side of the conveyor beam. A belt tensioner tool (51 18803) is available in order to facilitate installation of the belt and minimize the amount of slack in the return belt.

Ordering information The belt is delivered in assembled 1 m lengths. To calculate the total length required, remember to add for belt consumed by the idler and drive units.

Modular belts

Radius flush grid belt, Dry



Plain belt

Belt material Acetal (POM)
Pin material Polyamide (PA),
brown
Length 1 m
456 mm wide, White
456 mm wide, Blue

WLTP 1A456L
WLTP 1A456L B

Flat top belt



Flat top belt

Belt material Acetal (POM)
Pin material Acetal (POM), white
Length 1 m
456 mm wide

WLTP 1B456 W

Radius flush grid belt, Wet



Plain belt

Belt material Acetal (POM)
Pin material Acetal (POM),
white
Length 1 m
456 mm wide, White
456 mm wide, Blue

WLTP 1A456L W
WLTP 1A456L WB

Radius flush grid belt, Dry (Spare part only - Available as request for quote item)



Plain belt

Belt material Acetal (POM)
Pin material Polyamide (PA),
brown
Length 1 m
456 mm wide, White
456 mm wide, Blue


WLTP 1A456
WLTP 1A456 B

Belt tensioner tool for radius flush grid

Belt tensioner tool

5118803

Radius flush grid belt, Wet (Spare part only - Available as request for quote item)

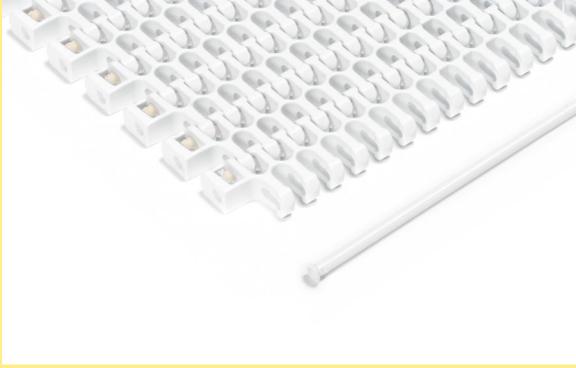

Plain belt

Belt material Acetal (POM)
Pin material Acetal (POM),
white
Length 1 m
456 mm wide, White
456 mm wide, Blue

WLTP 1A456 W
WLTP 1A456 WB

Introduction
X45
X45H
XS
XL
X65
XM
X70X
X85
X85X
XH
XK
X180
X180X
X300
X300X
XT
XTC
WK
WL
WL 222X
WL 273X
WL 374X
WL 526X
WL 678X
ELV
IDX

