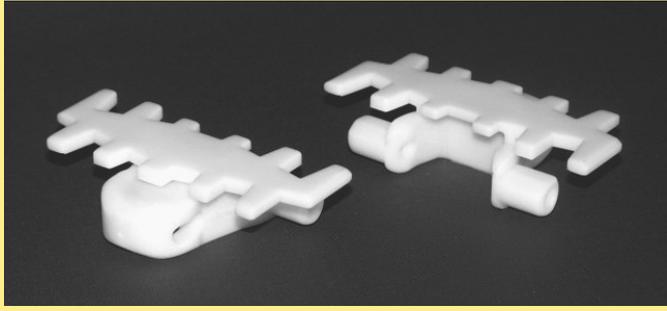
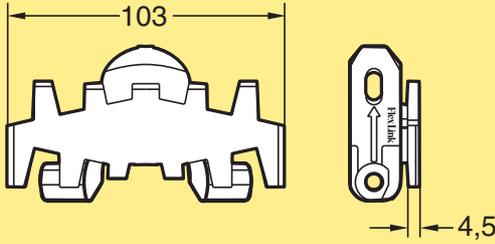


Conveyor system XH - links and chains

Each link kit contains 10 links, 10 plastic pivots, and 10 stainless steel pins, unless otherwise specified.



Material abbreviations: See page III.

Plain chain

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XHTP 5	XHTL 103	5056312		40 g	POM B	See page III
3924112	XHTL 103	5056313		40 g	POM B	PVDF
XHTP 5 E	XHTL 103 E	5056314			POM B COND	PA66 ISD
3904770	3904769	5056315		41 G	POM B polished	See page III
3927366	3927365	5056318			POM B GY	See page III
3926407	3926408	5056320			POM B BK	See page III
3927487	3927486	5056321		39 g	POM B ISD GY	PA66 ISD
3925940	3925939	5056323			POM B ISD NAT	PA66 ISD
3905384	3905383	5056324			PVDF	See page III
XHTP 5 C	n.a.	n.a.			POM D	See page III
5113238	5113239	(For Optical trays)			POM B GY	See page III




Plain chain with elevated surface

For drainage.

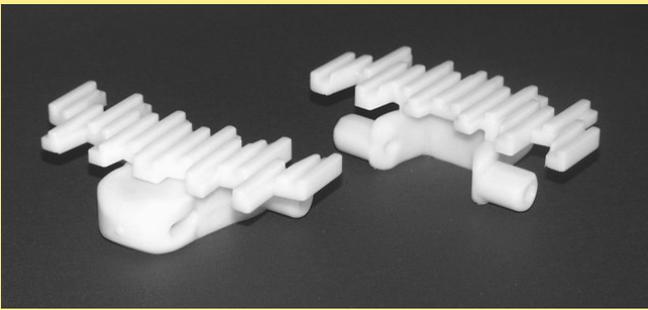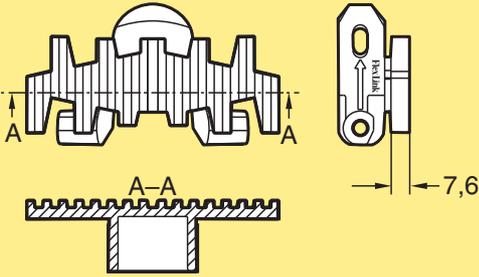Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3924104	3904673	5056592		46 g	POM A	PVDF




Friction top chain

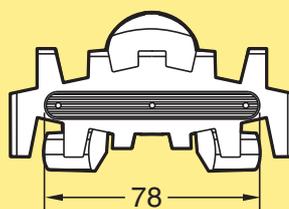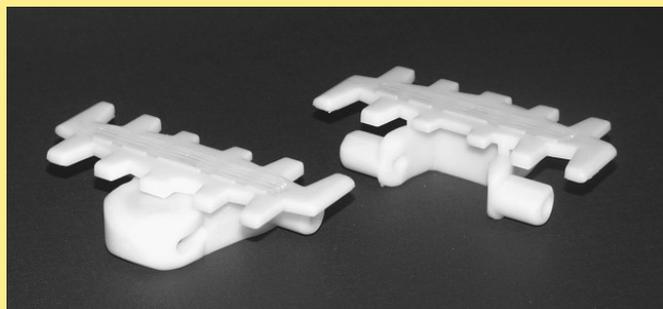

Friction insert is polyether-polyamide.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XHTP 5 F	XHTL 103 F	5056593		42 g	POM B	See page III
XHTP 5 FP	XHTL 103 F	5056593		42 g	POM B	See page III



Flat top friction chain

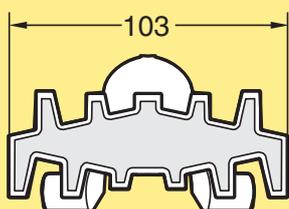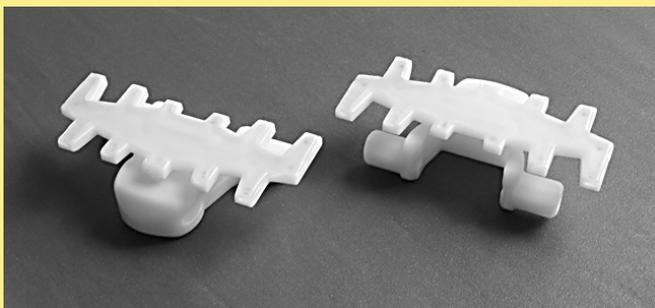

Friction insert is polyether-polyamide. Slope <math><30^\circ</math>. Light goods: blister packs, small boxes, etc.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XHTP 5 FA	XHTL 103 FA	5058544		40 g	POM B	See page III



Steel top chain, fingered

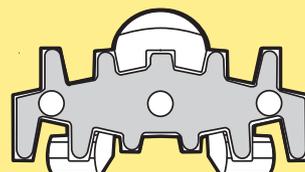

Top surface is stainless steel. Cast-metal products. Accumulation.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XHTP 5 TF	XHTL 103 TF	5056594		68 g	POM B + SS	See page III


Cleated chain

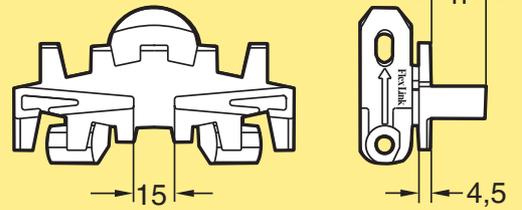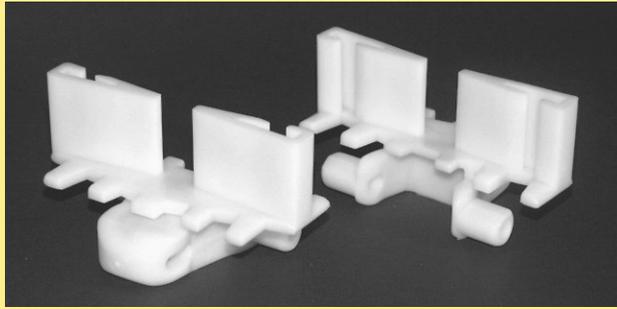

Center positioning.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XHTF 5X15 A...	XHTL 103X15 A	5056595	h=15 mm	51 g	POM B	See page III
XHTF 5X20 A...	XHTL 103X20 A	5056596	h=20 mm	55 g	POM B	See page III
XHTF 5X30 A...	XHTL 103X30 A	5056597	h=30 mm	62 g	POM B	See page III
XHTF 5X40 A...	XHTL 103X40 A	5056598	h=40 mm	76 g	POM B	See page III



Cleated chain

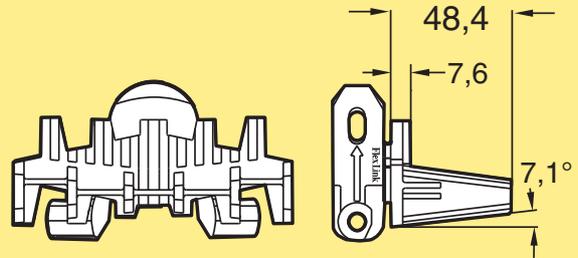

Cylindrical rollers. Wet applications. Cleated chain consists of flat top links 3904673 combined with cleated links 3903880. Also See link type 3904673.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3903881 PAR...	3903880	5056599		(65 g)	POM A	PVDF
	3904673	5056592				




Cleated chain

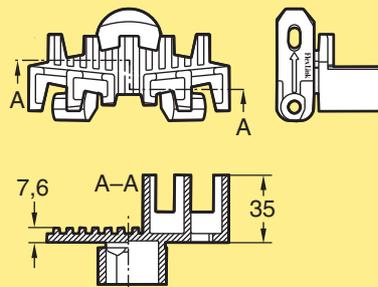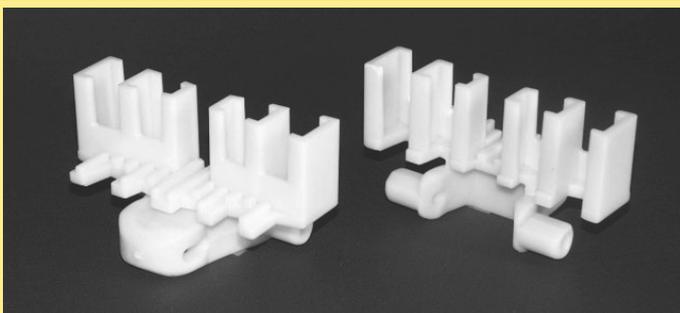

Cylindrical rollers. Wet applications. Cleated chain consists of flat top links 3904673 combined with cleated links 3904674. Also See link type 3904673.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3924105 PAR...	3904674	5056600		65 g	POM A	PVDF
	3904673	5056592				




Cleated chain

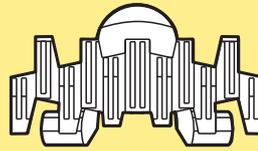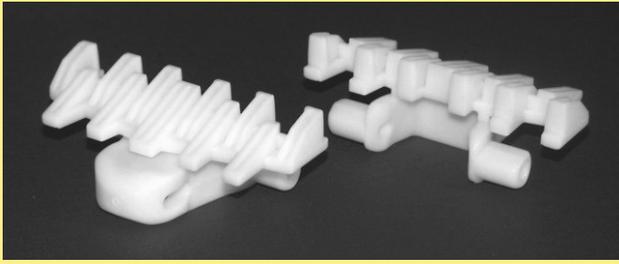

Cardboard boxes. Suitable to reduce accumulation forces in slopes (10°-20°).




Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3924103 PAR...	3903649	5056601		(52 g)	POM B	See page III

Cleated chain

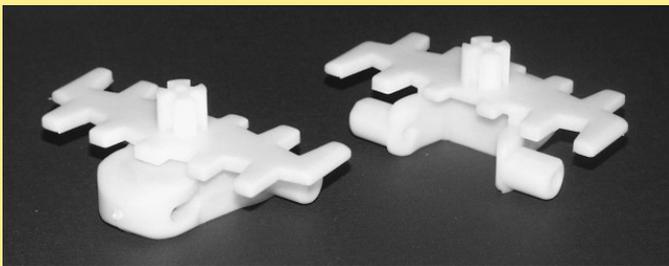




Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3905326 PAR...	3905325	5056602		43 g	POM A	See page III

Cleated chain

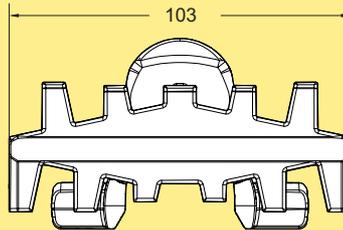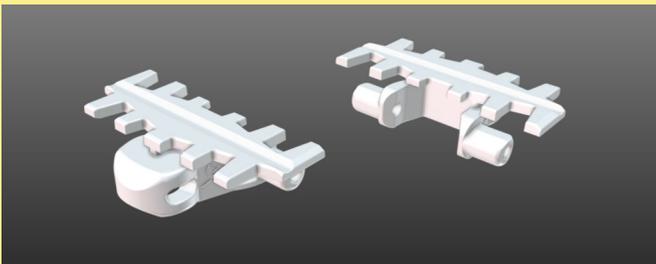




Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5113633	5113635	5113634		43 g	POM B	See page III

Cleated chain


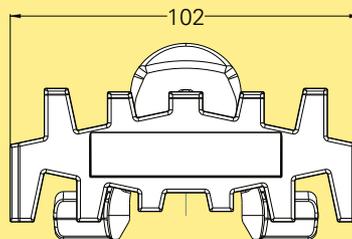
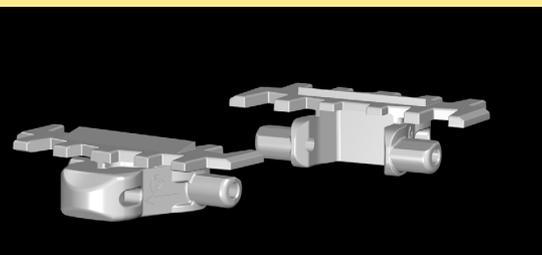


Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5129901	5129761	5129902		39 g	POM B	See page III




Flocked chain

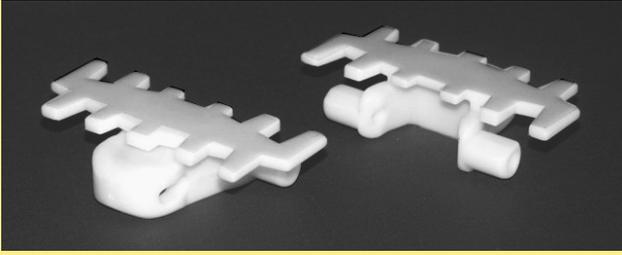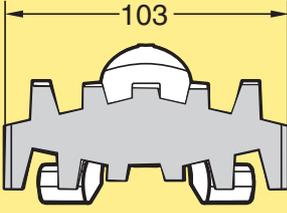						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5113723					POM B	See page III




Roller top chain

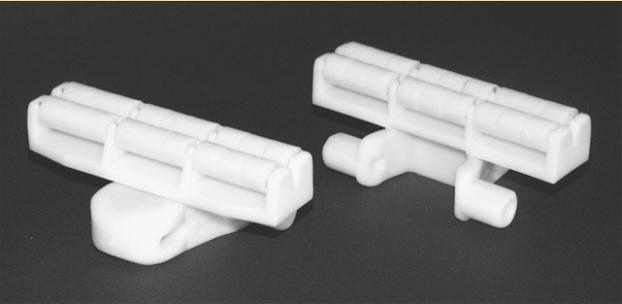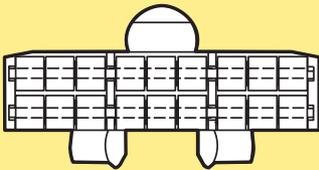						
Link cannot be used together with plain links. Accumulation of parcels for lower pressure.						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XHTR 5	XHTL 103 R	5056603		79 g	POM B	See page III
(3902819 Roller, order in multiples of 200 Pcs)						

Roller cleat chain

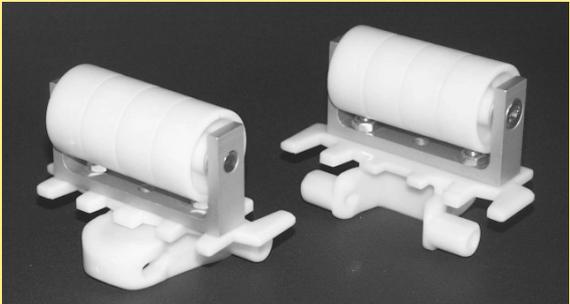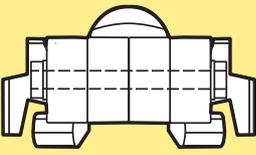						
* R1 can not be ordered. Roller support items in steel and aluminium. Vertical transport of cardboard boxes. Link kit 5056604:1 link XHTL 103X46 R with pivot and steel pin.						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XHTF 5X46 R...*	XHTL 103X46 R	5056604		158 g	POM B	See page III

Plain chain

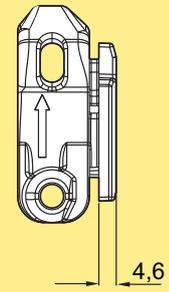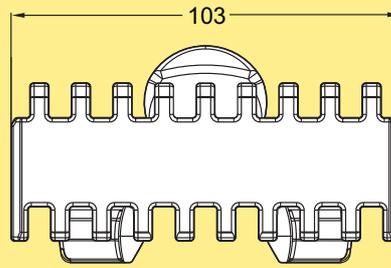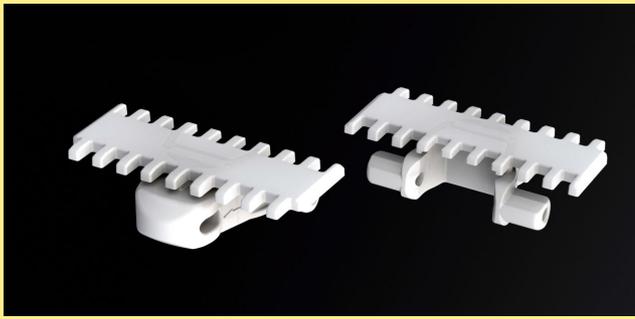

Note. Only for straight conveyors and only to be used with guided drive unit.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5125163	5125070	-		44 g	POM B	See page III

