


# Conveyor system X300

## Contents

System information.....	287	End drive units X300, direct drive, no slip clutch .....	294
Conveyor modules .....	288	End drive units X300, direct drive, slip clutch .....	294
Chains X300.....	289	End drive units X300, direct drive, slip clutch, guided.....	294
Chain accessories X300 .....	289	End drive units X300, direct drive, no slip clutch, guided..	295
Beam components X300 .....	290	Idlers X300.....	295
Beam accessories X300 .....	291	Bridges.....	296
Slide rails X300 .....	291	Plain bends X300 .....	297
Drive and idler units – introduction .....	293	Vertical bends X300 .....	298

## System information

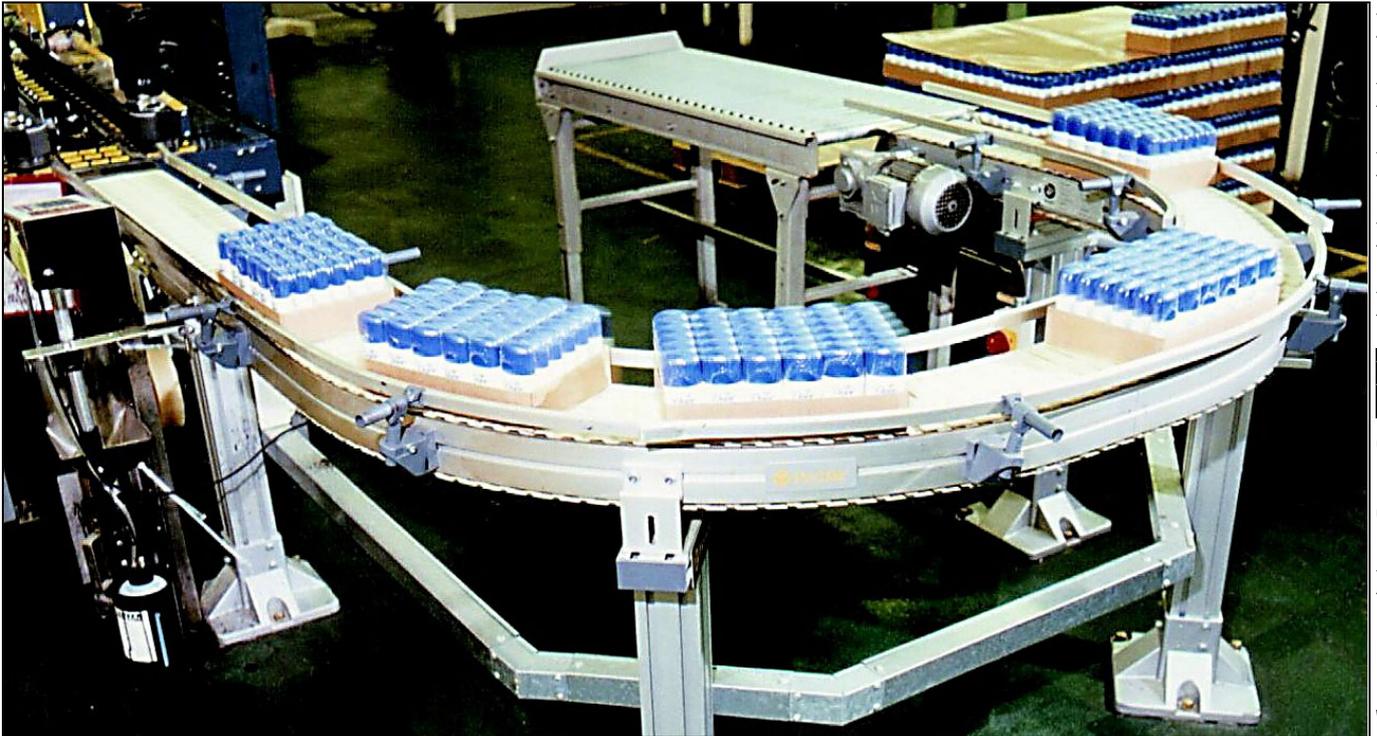

### Chain X300



### Features

Chain travels on four slide rails. Wide track sideflexing safety chain. Compact horizontal and vertical bends. Suitable for soft packages.

### Examples of application areas


Large cardboard boxes, products in soft plastic bags. Examples: detergent powder, wrapped tissue paper rolls, food products, personal care products.

### Technical characteristics

Drive unit capacity .....	1250 N
Chain tension limit .....	1250 N
Beam width.....	300 mm
Chain width.....	295 mm
Chain pitch.....	33,5 mm
Recommended item width .....	70–500 mm
Maximum item weight.....	15 kg
Maximum weight on conveyor .....	200 kg
Maximum conveyor length.....	30 m
Maximum permitted load per link	2,5 kg

# Conveyor modules


## Straight conveyor



Conveyor module – straight \* **5990226**

*\*Use online configurator when ordering*


## One bend conveyor

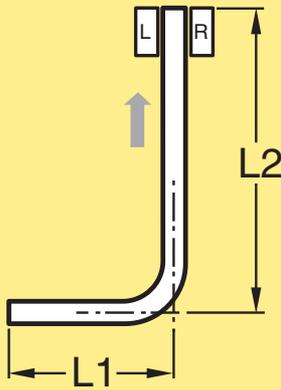

Conveyor module – one bend \* **5990230**

*\*Use online configurator when ordering*

## Two bend conveyor

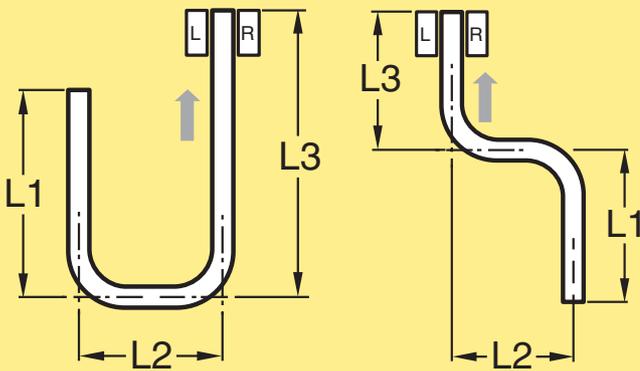

Conveyor module – two bends \* **5990237**


*\*Use online configurator when ordering*

## Support modules – single and multi-lane

	5995392	Single XB
	5995393	Multi single 2 lane
	5995394	Multi single 3 lane
	5995395	Multi single 4 lane
	5995396	Multi double 2 lane
	5995397	Multi double 3 lane
	5995398	Multi double 4 lane

## Chains X300

### Plain chain

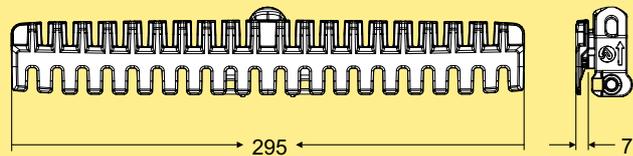

#### Plain chain

Length 3 m

Food & Wet applications

**XBTP 3A300 K**

**XBTPX 3A300 K**

#### Plain link kit \*


Food & Wet applications

**FLX1003734**

**FLX1003735**

\* Link kit contains 10 links, 10 pivots, 10 steel pins

### Friction top chain

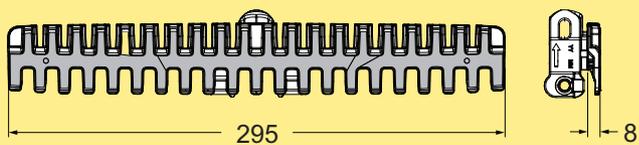

#### Friction top chain

Length 3 m


**XBTPX 3A300 K FA**

#### Friction top link kit\*

**FLX1009392**

\*Link kit contains 10 links, 10 pivots, 10 steel pins.

### Friction top chain

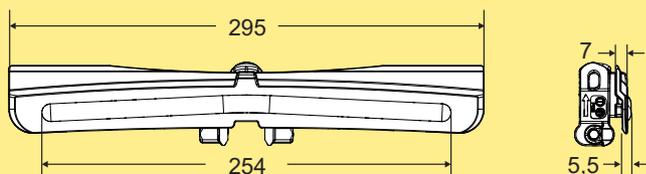

#### Friction top chain

Length 3 m

**XBTP 3A295 F**

#### Friction top chain

Length 3 m

**XBTP 3A295 FP**

Use the online configurator to specify and order.

#### Friction top link kit\*

Kit with 10 links

**5054874**

\*Note. Links are delivered as a kit containing 10 links and the necessary steel pins and plastic pivots.

## Other chains

See the *Chain guide* for a selection of other chains.

## Chain installation

See Appendix "D. Chain installation" on page 531, , for installation instructions.

## Chain accessories X300

### Plastic pivot




Plastic pivot -X180-X300 kit

**5111169**

Each kit contains 25 items.

### Steel pin




Steel pin X180-X300 kit

**5111172**

Each kit contains 25 items.

### Pin insertion tool for chain

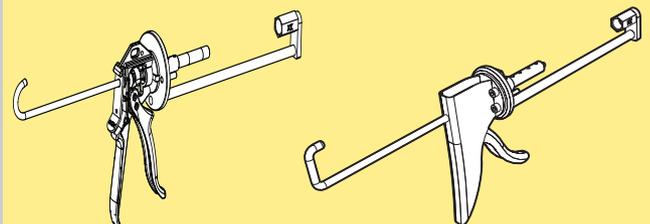

Pin insertion tool

X85--X180-X300

X85-X180-X300-XH, PRO version\*


**XMMJ 6**

**XBMJ 6 P**

\*This tool is recommended for frequent users

# Beam components X300


## Beam section kit (300 mm version)

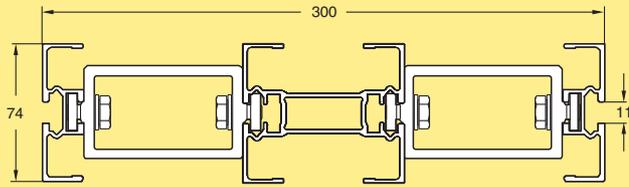

Beam section kit  
 Length 2995 ±1 mm **XBCB 3A300**  
 Length to order (500- 2995 mm) **XBCB LA300**


*The beam section is delivered unassembled.  
 Slide rail: see page 291*

## Beam (mid-section)




Beam (mid-section)  
 Length 3000 +10/-0 mm **XBCB 3A85**  
 Length to order (500- 3000 mm) **XBCB LA85**

## Beam (outer section)




Beam (outer section)  
 Length 3000 +10/-0 mm **XBCB 3A H**  
 Length to order (500- 3000 mm) **XBCB LA H**

## Profile for split conveyor beam (inner section)



Profile for split conveyor beam  
 Length 3000 +10/-0 mm **XBCB 3A85 H**  
 Length to order (500- 3000 mm) **XBCB LA85 H**


## Spacer for outer beam sections



Spacer, aluminium, one pair **XBCE 85**

*Including screws and nuts. For construction of 300 mm wide beam sections. Maximum distance between spacers is 0,5 m. Contains 2 pcs.*


## Beam clip assembly

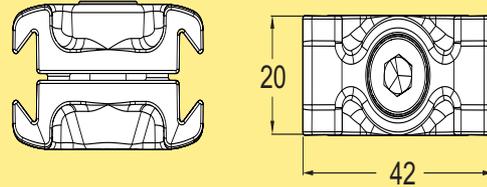

Beam clip assembly **XBCE 42x20 A**

*Including M8 screw and locking nut. Use minimum 5 clips per meter. Place clips 100 mm from each end. Note. Contains 10 pcs..*

## Beam section for chain installation

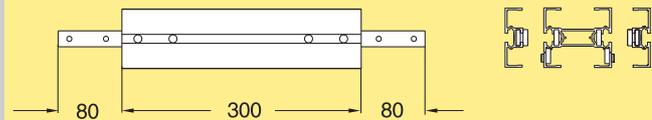

Beam section for chain installation  
 Including connecting strips and screws

**XBCC 300A**

*Can only be mounted between two straight beam sections.*

**Connecting strip with set screws**

Connecting strip with set screws  
 $h=20, a=44, b=44, L=160$  **XSCJ 6x160**

*Note. Contains 10 pcs.*

**Cover strip for T-slot, PVC**

Cover strip for T-slot  
 Length 25 m  
 Grey PVC **XCAC 25 P**

**Cover strip for T-slot, PVC**

Cover strip for T-slot, grey PVC  
 Length 3 m **XCAC 3 P**

*Note! Can't be used with bends*

**Cover strip for T-slot, aluminium**

Cover strip for T-slot  
 Aluminium, anodized  
 Length 2 m **XCAC 2**

*Note! Can't be used with bends*

**Slide rails X300**

**Plastic slide rail for X300 beam**

Slide rail  
 Length 25 m  
 HDPE (Black) **XBCR 25**  
 PA-PE (Grey) **XBCR 25 H**  
 PVDF (Natural white) **XBCR 25 P**  
 PE-UHMW (White) **XBCR 25 U**  
 PE-UHMW (Blue) **XBCR 25 UL A**  
 PE-UHMW conductive (Black) **XBCR 25 E**

*See Appendix A, page 521 for selection guidelines and assembly instructions.*

**Mounting tool for slide rail**

Mounting tool for slide rail (X85) **XBMR 170**

**Plastic slide rail for X300 beam, outer**

Slide rail, outer  
 UHMW-PE ( $\mu=0,1-0,25$ ) (White)  
 Length 3 m **XBCR 3 UA**


*See Appendix A, page 521 for selection guidelines and assembly instructions.*

**Aluminium rivets**

Aluminium rivets 4 mm for XK-  
 X180-X300 conveyors, brown **XLAH 4x7**

*Extra slide rail in plain bends must be anchored using plastic screws due to lack of space for the rivet crimping tool.  
 Note. Contains 250 pcs.*

**Plastic screws for slide rail**




Plastic screws 5 mm for XS-X65-X85-XH-X180-X300 beams

**XLG 5**

See mounting instruction "Anchoring slide rail using plastic screws" on page 526

Note. Contains 50 pcs.

**Drill fixture for slide rail**

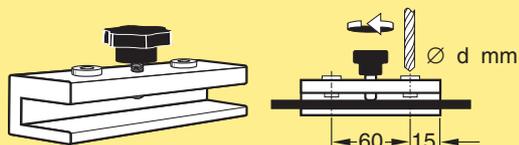

Drill fixture for X65-X85-XH-XK-X180-X300 slide rail  
d=4,2 mm

**3920500**

**Rivet crimping pliers**




Rivet crimping pliers for X65-X85-XH-XK-X180-X300

For 4 mm rivets

**5051395**

**Rivet crimping clamp**

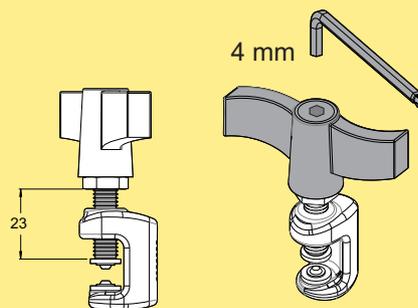

Rivet crimping clamp for X65-X85-XH-XK-X180-X300

For 4 mm rivets



**3923005**

## Drive unit types

The X300 system includes direct driven units with or without slip clutch.

Available motors include variable speed types (**V**) as well as fixed speed motors (**F**).

### End drive units

Size	Direct drive, no slip clutch	Direct drive, slip clutch
		
Heavy	F, V	F, V
Heavy, guided	F, V	F, V

## Motor specifications

Motors are available for 230/400 V, 50 Hz and 230/460 V, 60 Hz. Variable speed motors are SEW Movimot, 380–500 V. Note that variable speed motors include a control box that adds 120 mm to the width of the motor.

IP55 available with standard oil.

IP65 available with food grade oil.

## Ordering information

Drive units with motors must be specified using the web-based configurator. The configurator provides detailed information and step-by-step guidance in the specification process. A product code string is generated, containing the specification details. See next page for examples of code strings.

Drive units *without* motors can be ordered using the designations in the catalogue.

## Dimension

Note that dimensions relating to drive unit motors depend on the motor specified during the configuration.

PO

CC

X45

XS

X65

X65P

X85

X85P

XH

XK

XKP

X180

X300

GR

CS

XT

HU

WL

WK

XC

XF

XD

ELV

SC

FST

TR



APX

IDX

## End drive units X300, direct drive, no slip clutch

## End drive units X300, direct drive, slip clutch

### End drive unit, direct drive, no slip clutch

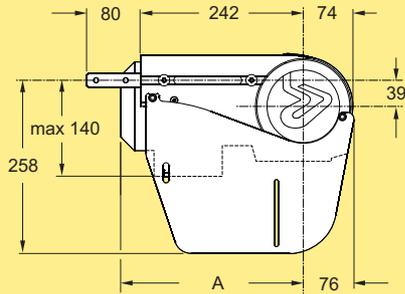

End drive unit, direct drive  
 Fixed speed up to 60 m/min  
 Variable speed up to 80 m/min  
 Motor on left side  
 Fixed/variable speed \*  
 Without motor



**XBEB A300**  
**XBEB 0A300HNLP**

Motor on right side  
 Fixed/variable speed \*  
 Without motor

**XBEB A300**  
**XBEB 0A300HNRP**

Maximum traction force: 1250 N. See page 22.  
 \*Use online configurator when ordering.  
 Effective track length: 0,80 m

### End drive unit, direct drive, slip clutch



End drive unit, direct drive  
 Fixed speed up to 60 m/min  
 Variable speed up to 80 m/min  
 Motor on left side  
 Fixed/variable speed \*  
 Without motor

**XBEB A300**  
**XBEB 0A300HLP**



Motor on right side  
 Fixed/variable speed \*  
 Without motor

**XBEB A300**  
**XBEB 0A300HRP**

Maximum traction force: 1250 N. See page 22.  
 \*Use online configurator when ordering.  
 Effective track length: 0,80 m

## End drive units X300, direct drive, slip clutch, guided

### End drive unit H, guided chain, slip clutch

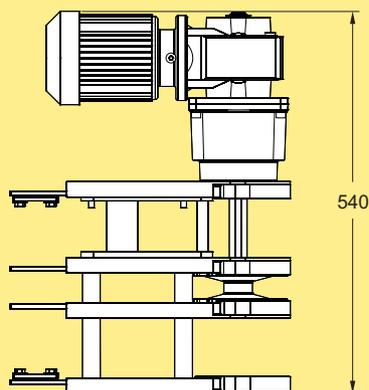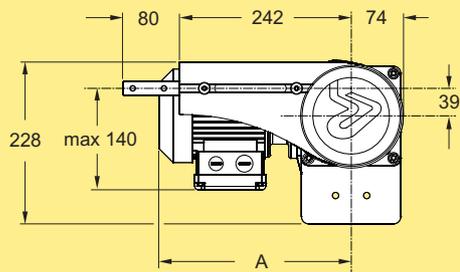

#### End drive unit

Direct drive with guided chain. Adjustable slip clutch.  
Maximum traction force: up to 1250 N.  
Fixed speeds up to 60 m/min.  
Variable speed up to 80 m/min.

Motor on left side:

Fixed/variable speed \* **XBEB A300**  
Without motor **XBEB 0A300HLGP**


Motor on right side:

Fixed/variable speed \* **XBEB A300**  
Without motor **XBEB 0A300HRGP**

\*Use online configurator when ordering.

Effective track length: 0,80 m

### Guide wheel kit 300


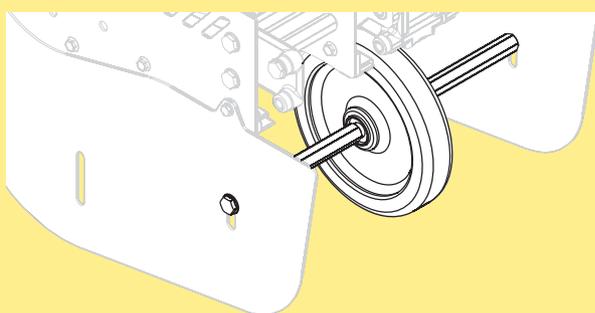


Guide wheel for drive units **5114930**

Including wheel, shaft and mounting hardware.  
Note. Can only be used with plain chain. For use in high speed operation (60 m/min and above) or use for a more quiet operation at lower speed.

## End drive units X300, direct drive, no slip clutch, guided

### End drive unit H, guided chain, no slip clutch

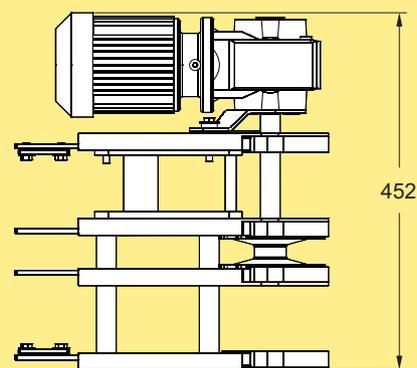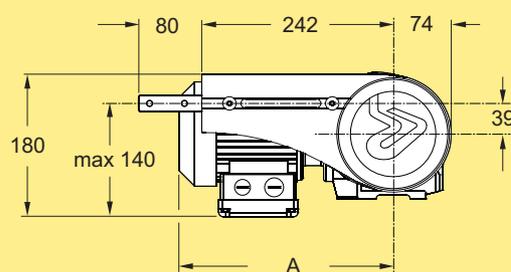

#### End drive unit

Direct drive with guided chain. No slip clutch.  
Maximum traction force: up to 1250 N.  
Fixed speeds up to 60 m/min.  
Variable speed up to 80 m/min.

Motor on left side:

Fixed/variable speed \* **XBEB A300**  
Without motor **XBEB 0A300HNLGP**

Motor on right side:


Fixed/variable speed \* **XBEB A300**  
Without motor **XBEB 0A300HNRGP**

\*Use online configurator when ordering.

Effective track length: 0,80 m

## Idlers X300

### Idler end unit

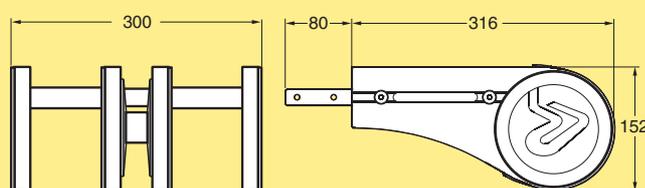


Idler end unit

**XBEJ A300**

Effective track length: 0,80 m

PO  
CC  
X45  
XS  
X65  
X65P  
X85  
X85P  
XH  
XK  
XKP  
X180  
X300  
GR  
CS  
XT  
HU  
WL  
WK  
XC  
XF  
XD  
ELV  
SC  
FST  
TR  
APX  
IDX

## Passive bridge from conveyor to conveyor

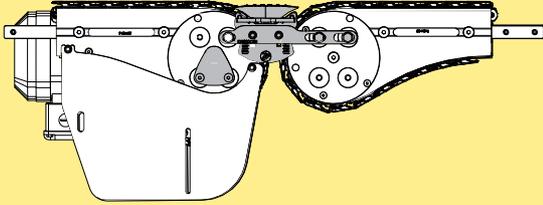

Passive bridge\*

**XBNG A300**

From: Heavy Drive To: Heavy Idler

\* Use online configurator when ordering.


## Attachment wire



Wire for attaching roller to holder **FLX1006041**

\*Also available as a configuration option through XBNG A300.

## Sensor Kit

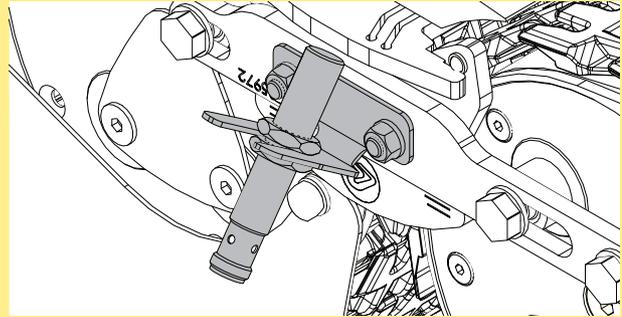

Bridge in position sensor kit

Conveyor to conveyor

**FLX1006042**

External to/from Conveyor

**FLX1006044**


\*Also available as a configuration option through XBNG A300.

Includes: Bracket & PNP sensor (NO), M12xL=70mm, M12 connector. No cables.


\*Note

Bridges can not be used with cleated chain.

## Passive bridge to or from machine or application, Single or double rollers

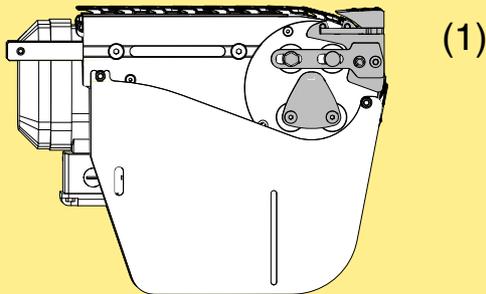

(1)

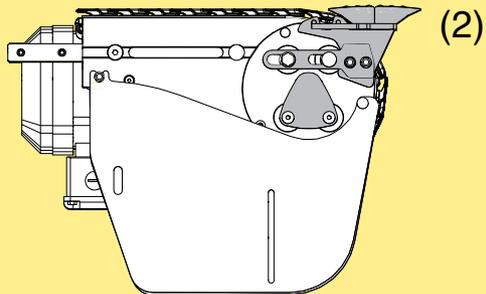

(2)

Passive bridge\*

Single roller (1) or Double roller (2) **XBNG A300**

From: Heavy Drive External  
External Heavy Idler

\* Use online configurator when ordering.

**Plain bend, 30°**

Plain bend, 30°±1°  
 R=700±10 mm  
 R=1000±10 mm

**XBBP 30A300R7**  
**XBBP 30A300R10**

*Effective track lengths:*  
 R700: 1,55 m (top+bottom)  
 R1000: 1,85 m (top+bottom)

**Plain bend, 60°**

Plain bend, 60°±1°  
 R=700±10 mm  
 R=1000±10 mm

**XBBP 60A300R7**  
**XBBP 60A300R10**

*Effective track lengths:*  
 R700: 2,30 m (top+bottom)  
 R1000: 2,90 m (top+bottom)

**Plain bend, 45°**

Plain bend, 45°±1°  
 R=700±10 mm  
 R=1000±10 mm

**XBBP 45A300R7**  
**XBBP 45A300R10**

*Effective track lengths:*  
 R700: 1,90 m (top+bottom)  
 R1000: 2,40 m (top+bottom)

**Plain bend, 90°**


Plain bend, 90°±1°  
 R=700±10 mm  
 R=1000±10 mm

**XBBP 90A300R7**  
**XBBP 90A300R10**

*Effective track lengths:*  
 R700: 3,00 m (top+bottom)  
 R1000: 3,95 m (top+bottom)

## Vertical bends X300


### Vertical bend, 5°

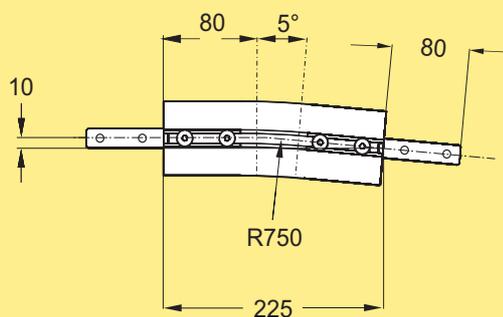

### Vertical bend, 5° **XBBV 5A300R750**

Four outer section beam pieces, unassembled.  
Effective track length: 0,50 m (top+bottom)


### Vertical bend, 15°

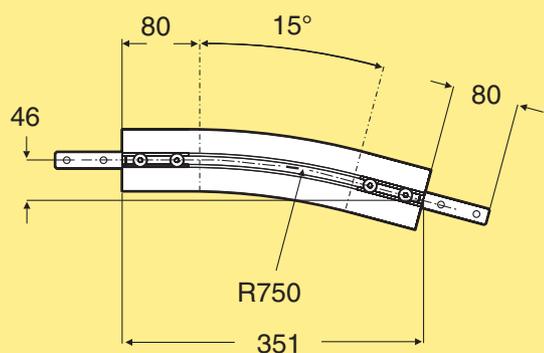

### Vertical bend, 15° **XBBV 15A300R750**

Four outer section beam pieces, unassembled.  
Effective track length: 0,75 m (top+bottom)

### Vertical bend, 45°

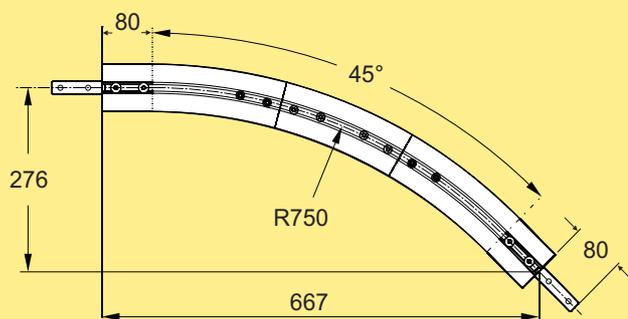

### Vertical bend, 45° **XBBV 45A300R750**

Four outer section beam pieces, unassembled.  
Effective track length: 1,5 m (top+bottom)