


# Conveyor support components

## Contents

|   |     |  |     |
|---|-----|--|-----|
| Beams, brackets and feet .....                | 335 | Foot plates .....                              | 341 |
| Conveyor support designs .....                | 336 | Adjustable feet .....                          | 342 |
| Support beams .....                           | 337 | End plates .....                               | 342 |
| Beam support brackets – selection guide ..... | 338 | Polyamide feet .....                           | 343 |
| Beam support brackets for drip trays .....    | 338 | Height adjustment assembly .....               | 344 |
| Support beams 44 mm .....                     | 339 | Beam support brackets Type CT .....            | 344 |
| Support beams 64 mm .....                     | 339 | Beam support brackets Type CS .....            | 345 |
| Support beams 88 mm .....                     | 339 | Beam support brackets Type CS, polyamide ..... | 346 |
| Angle brackets and mounting plates .....      | 340 | Beam support brackets Type CU .....            | 347 |
| Feet, die-cast .....                          | 341 | Beam support brackets X45, diecast .....       | 348 |

## Beams, brackets and feet

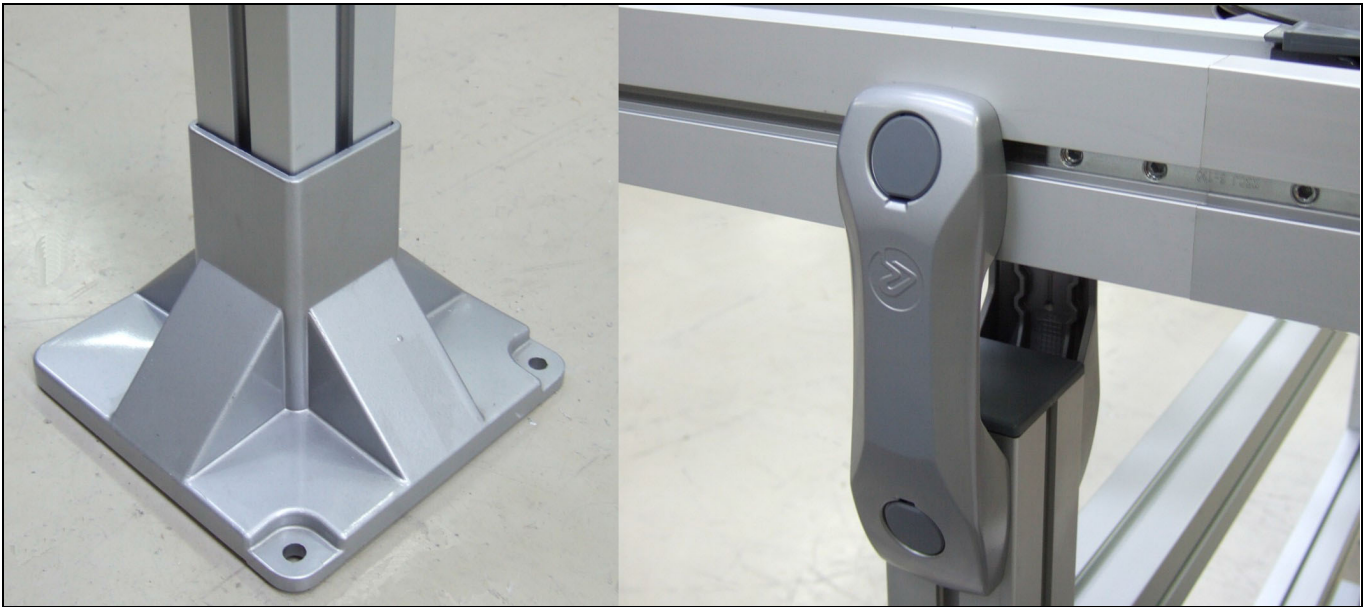

### Beams

Most conveyor support designs are based on vertical support beams combined, if necessary, with horizontal support beams. The conveyor must be supported at regular intervals not exceeding 3 m. The support beams come in dimensions suitable for all conveyor sizes.

### Beam support brackets

Conveyor beam support brackets are used to connect the conveyor to the support system. Brackets are available for connection to vertical and horizontal support beams.

### Feet

A selection of feet is available, ranging from heavy-duty die-cast aluminium feet to adjustable feet and foot plates.

### Standard support solutions

This catalogue section lists components for a selection of standard, well proven support solutions. For applications requiring special support designs, additional components can be found in catalogue sections *Structural system*.

The structural system includes beams, feet, and several types of beam connecting devices, as well as a large selection of enclosure components.


### Product configurator

A number of standard support solutions can be ordered by means of a product configurator.


Please contact FlexLink Systems for more information.

PO  
CC  
X45  
XS  
X65  
X65P  
X85  
X85P  
XH  
XK  
XKP  
X180  
X300  
GR  
CS  
XT  
HU  
WL  
WK  
XC  
XF  
XD  
ELV  
SC  
FST  
TR  
APX  
IDX


## Single support X65

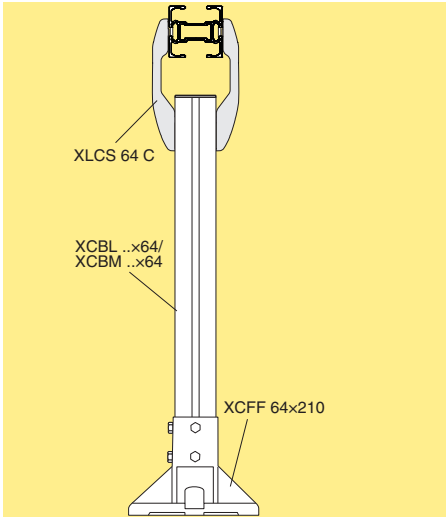


## Single support X85

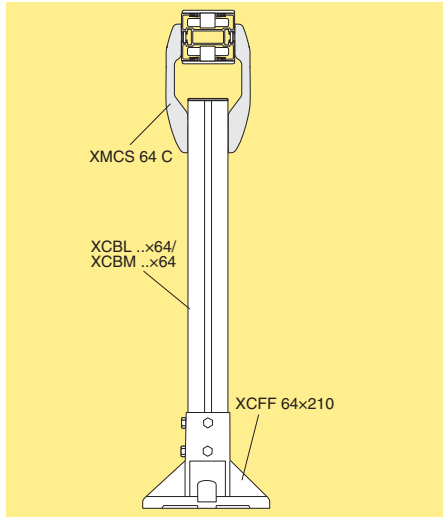


## Single support X85

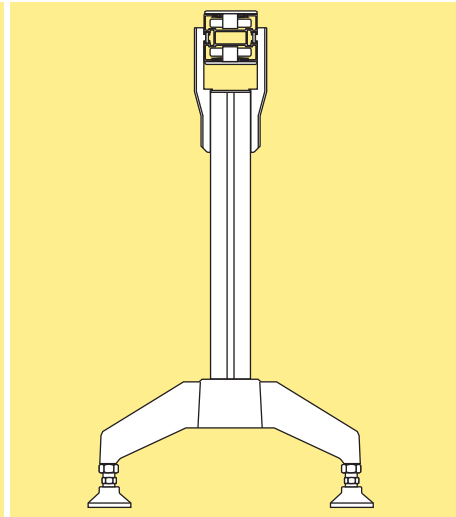


## Single support – X85x2

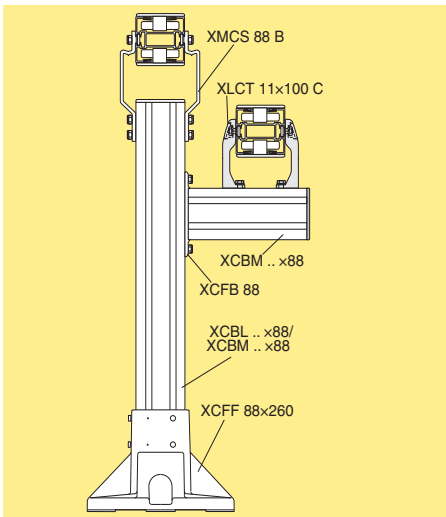


## Single support X180/X300

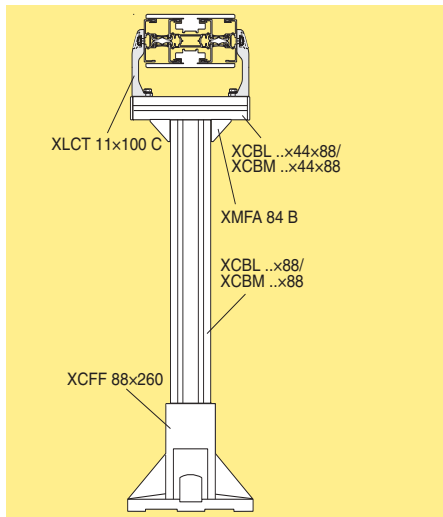


## Double support – X65x2

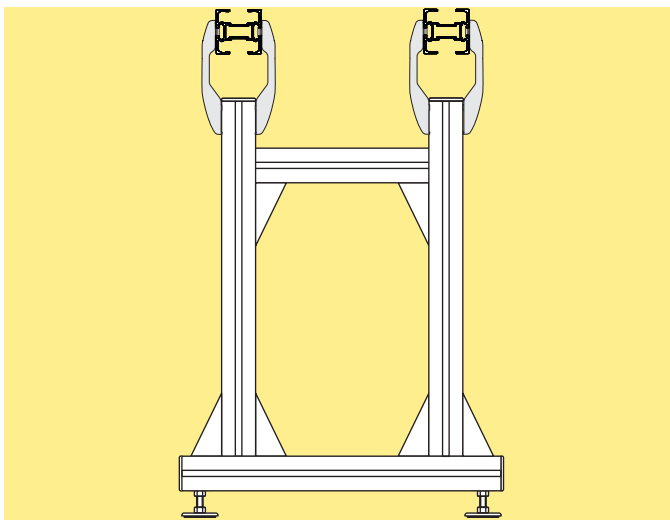

## Double support – XHx3

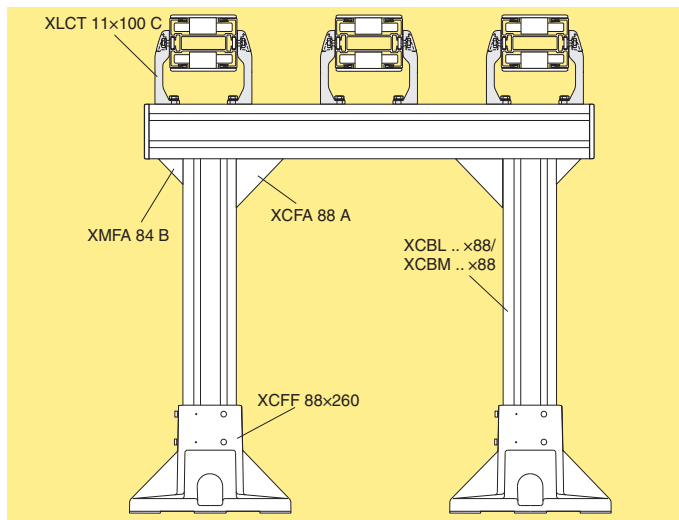

# Support beams

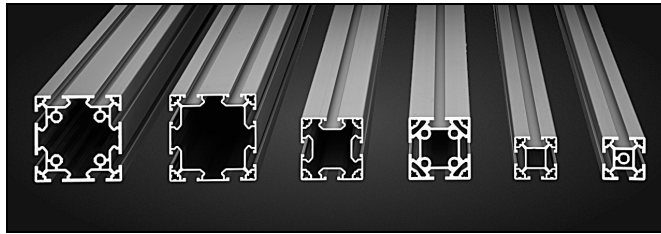


## Standard and lightweight beams

The following table lists suitable beams for conveyor support from the Structural system XC product line. The beams come in standard and lightweight versions. The standard lengths is 3 m. Beams cut to custom length (L) can also be delivered. The table also lists suitable feet and foot plates. Other foot arrangements are also possible.

| Dimensions (mm)   | Designation | Foot                       | Foot plate |
|-------------------|-------------|----------------------------|------------|
| 44x44 standard    | XCBM 3/Lx44 | XCFF 44x130                | XCFB 44 F  |
| 44x44 lightweight | XCBL 3/Lx44 | XCFF 44x130                | XCFB 44 F  |
| 64x64 standard    | XCBM 3/Lx64 | XCFF 64x210<br>XEFG 64 T/D | n.a.       |
| 64x64 lightweight | XCBL 3/Lx64 | XCFF 64x210<br>XEFG 64 T/D | n.a.       |
| 88x88 standard    | XCBM 3/Lx88 | XCFF 88x260                | XCFB 88 F  |
| 88x88 lightweight | XCBL 3/Lx88 | XCFF 88x260                | XCFB 88 F  |

## Beam cutting length

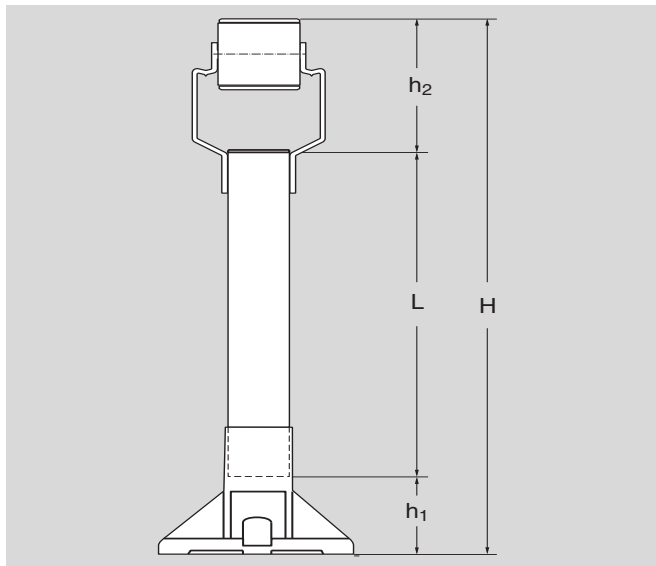

The beam length required to obtain a specific conveyor height H depends on the conveyor size, foot type and beam support bracket. See figure. Type CS beam support brackets are used. Read more about beam support brackets on page 338. Feet: see page 341.

In the following formula H represents the height from the floor to the top of a standard plain chain. Most support combinations permit height adjustment both at the foot and at the beam support bracket.

$$L = H - h_1 - h_2$$

## Net height of foot $h_1$

| Foot type                      | $h_1$ mm |
|--------------------------------|----------|
| Foot plate XCFB 44 F/XCFB 88 F | 8        |
| Foot XCFF 44x130               | 0–30     |
| Foot XCFF 64x210               | 0–40     |
| Foot XCFF 88x260               | 0–50     |

## Height $h_2$ of beam support bracket + half beam height

| Beam     | Bracket type | $h_2$ mm |     |     |     |    |
|----------|--------------|----------|-----|-----|-----|----|
|          |              | XS       | X65 | X85 | XH  | XK |
| 44x44 mm | XSCS 44      | 156      | –   | –   | –   | –  |
| 44x44 mm | XLCS 44      | –        | 156 | –   | –   | –  |
| 44x44 mm | XLCS 64 P    | 118      | –   | –   | –   | –  |
| 64x64 mm | XSCS 64      | 155      | –   | –   | –   | –  |
| 64x64 mm | XLCS 64      | –        | 155 | –   | –   | –  |
| 64x64 mm | XLCS 64 P    | –        | 119 | –   | –   | –  |
| 64x64 mm | XLCS 64 C    | –        | 140 | –   | –   | –  |
| 64x64 mm | XMCS 64 C    | –        | 170 | –   | –   | –  |
| 64x64 mm | XMCS 64 P    | –        | 125 | –   | –   | –  |
| 64x64 mm | XHCS 64 B    | –        | –   | 181 | –   | –  |
| 88x88 mm | XLCS 88      | –        | 155 | –   | –   | –  |
| 88x88 mm | XMCS 88 B    | –        | 181 | –   | –   | –  |
| 88x88 mm | XHCS 88 B    | –        | –   | 181 | –   | –  |
| 88x88 mm | XKCS 88 R    | –        | –   | –   | 212 | –  |

See “Beam support brackets” for more information.


## Interconnecting support beams

Combinations of support beams are used for example to support multitrack conveyors. A selection of angle brackets and mounting plates from Structural system XC are available for interconnections. See page 340.

PO  
CC  
X45  
XS  
X65  
X65P  
X85  
X85P  
XH  
XK  
XKP  
X180  
X300  
GR  
CS  
XT  
HU  
WL  
WK  
XC  
XF  
XD  
ELV  
SC  
FST  
TR  
APX  
IDX

# Beam support brackets – selection guide

## Type CT for crossing support beam 64/88 mm

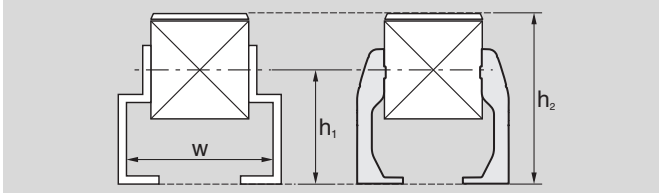


| Bracket type  | Height to top of chain $h_2$ mm |     |     |     |     | Comments         |
|---------------|---------------------------------|-----|-----|-----|-----|------------------|
|               | XS                              | X65 | X85 | XH  | XK  |                  |
| XLCT 11×100 C | 137                             | 137 | 144 | 144 | 157 | 146 $h_1=100$ mm |
| XLCT 21×135 B | 172                             | 172 | 179 | 179 | 192 | 181 $h_1=135$ mm |
| XLCT 21×158 R | 195                             | 195 | 202 | 202 | 215 | 204 $h_1=158$ mm |
|               | Width W:                        |     |     |     |     |                  |
| XLCT 11×100 C | 67                              | 87  | 107 | 127 | 127 | 204/322          |
| XLCT 21×135 B | 87                              | 107 | 127 | 147 | 147 | 224              |
| XLCT 21×158 R | 87                              | 107 | 127 | 147 | 147 | 224              |

Aluminium, diecast

Type XLCT 21×158 R is intended for 88 mm crossing beam


The heights above chain refer to standard plain chain.

## Type CS for vertical support beam 44 mm

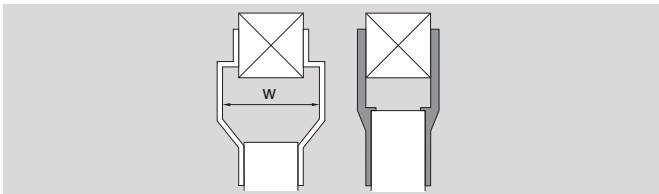


| Bracket type | XS   | X65  | X85  | XH   | XK   | Comments  |
|--------------|------|------|------|------|------|-----------|
|              | W mm | W mm | W mm | W mm | W mm |           |
| XSCS 44      | 87   | –    | –    | –    | –    | –         |
| XLCS 44      | –    | 107  | –    | –    | –    | –         |
| XLCS 64 P    | 45   | –    | –    | –    | –    | Polyamide |

## Type CS for vertical support beam 64 mm

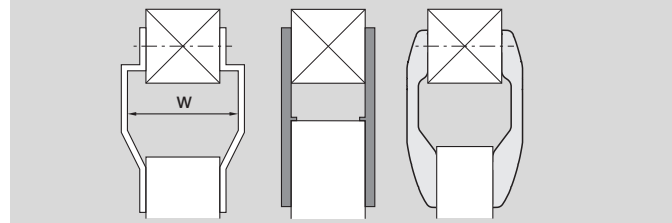

| Bracket type | XS   | X65  | X85  | XH   | XK   | Comments           |
|--------------|------|------|------|------|------|--------------------|
|              | W mm | W mm | W mm | W mm | W mm |                    |
| XSCS 64      | 87   | –    | –    | –    | –    | –                  |
| XLCS 64 P    | –    | –    | –    | –    | –    | Polyamide          |
| XLCS 64 C    | –    | 87   | –    | –    | –    | Aluminium, diecast |
| XMCS 64 C    | –    | –    | 107  | –    | –    | Aluminium, diecast |
| XMCS 64 P    | –    | –    | 85   | –    | –    | Polyamide          |
| XHCS 64 B    | –    | –    | –    | 147  | –    | –                  |


## Type CU for vertical support beam 88 mm

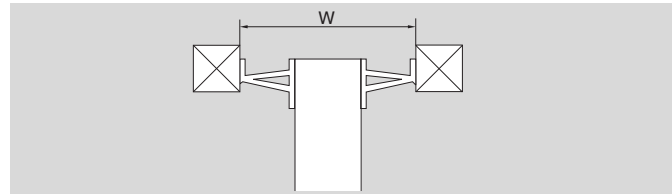

| Bracket type | XS   | X65  | X85  | XH   | XK   | Comments |
|--------------|------|------|------|------|------|----------|
|              | W mm | W mm | W mm | W mm | W mm |          |
| XLCU 73      | 235  | 235  | 235  | 235  | 235  | –        |
| XLCU 103     | 295  | 295  | 295  | 295  | 295  | –        |


## Beam support brackets for drip trays

### Type CT for crossing support beam 64/88 mm

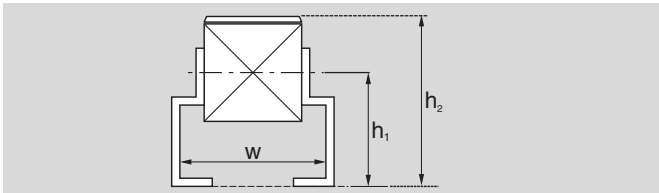

| Bracket type  | Height to top of chain $h_2$ mm |     |     |     | Comments     |
|---------------|---------------------------------|-----|-----|-----|--------------|
|               | X65                             | X85 | XH  | XK  |              |
| XLCT 21×135 B | 172                             | 179 | 179 | 192 | $h_1=135$ mm |
| XLCT 21×158 R | 195                             | 202 | 202 | 215 | $h_1=158$ mm |
|               | Width W:                        |     |     |     |              |
| XLCT 21×135 B | 107                             | 127 | 147 | 147 |              |
| XLCT 21×158 R | 107                             | 127 | 147 | 147 |              |

### Type CS for vertical support beam 88 mm

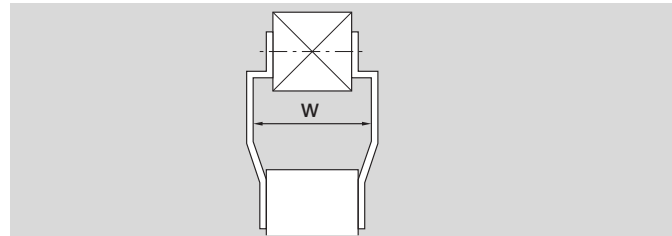


| Bracket type | X65  | X85  | XH   | XK   | Comments |
|--------------|------|------|------|------|----------|
|              | W mm | W mm | W mm | W mm |          |
| XLCS 88      | 107  | –    | –    | –    | –        |
| XMCS 88 B    | –    | 127  | –    | –    | –        |
| XHCS 88 B    | –    | –    | 147  | 147  | –        |
| XKCS 88 R    | –    | –    | –    | 147  | –        |

## Support beams 44 mm

PO

### Support beam 44×44

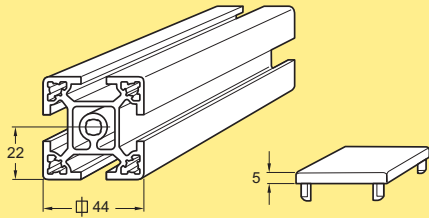


Support beam 44 mm × 44 mm  
 Length 3 m (3030 ±5 mm) **XCBM 3×44**  
 Length to order (30- 3000 mm) **XCBM L×44**

End cap, polyamide **XCBE 44**

*Note. Contains 10 pcs.*

### Support beam 44×44, lightweight

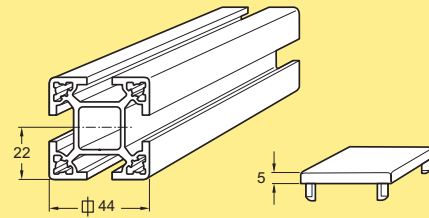

Support beam 44 mm × 44 mm, light  
 Length 3 m (3030 ±5 mm) **XCBL 3×44**  
 Length to order (30- 3000 mm) **XCBL L×44**

End cap, polyamide **XCBE 44**

*Note. Contains 10 pcs.*

CC

X45

XS

X65

X65P

X85


X85P

## Support beams 64 mm

XH

XK

### Support beam 64×64

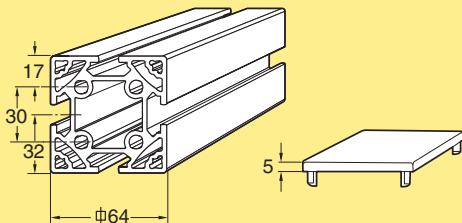


Support beam 64 mm × 64 mm  
 Length 3 m (3030 ±5 mm) **XCBM 3×64**  
 Length to order (30- 3000 mm) **XCBM L×64**

End cap, polyamide **XCBE 64**

*Note. Contains 10 pcs.*

### Support beam 64×64, lightweight

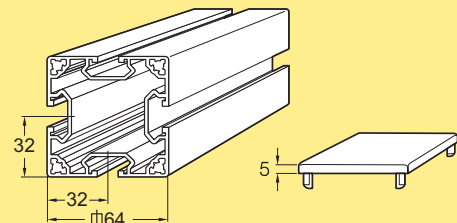

Support beam 64 mm × 64 mm, light  
 Length 3 m (3030 ±5 mm) **XCBL 3×64**  
 Length to order (30- 3000 mm) **XCBL L×64**

End cap, polyamide **XCBE 64**

*Note. Contains 10 pcs.*

XKP

X180

X300

GR

CS


XT

HU

## Support beams 88 mm

WL

### Support beam 88×88

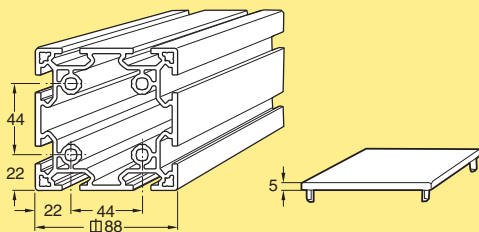


Support beam 88 mm × 88 mm  
 Length 3 m (3030 ±5 mm) **XCBM 3×88**  
 Length to order (30- 3000 mm) **XCBM L×88**

End cap, polyamide **XCBE 88**

*Note. Contains 10 pcs.*

### Support beam 88×88, lightweight

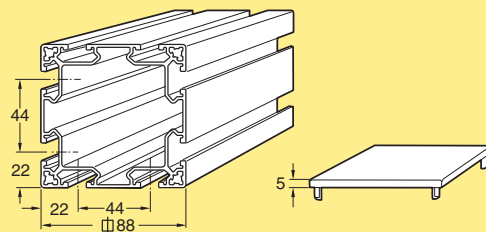

Support beam 88 mm × 88 mm, light  
 Length 3 m (3030 ±5 mm) **XCBL 3×88**  
 Length to order (30- 3000 mm) **XCBL L×88**

End cap, polyamide **XCBE 88**

*Note. Contains 10 pcs.*

WK

XC

XF

XD

ELV

SC


FST

TR

APX

IDX

## Angle bracket, die-cast, 42×42×38

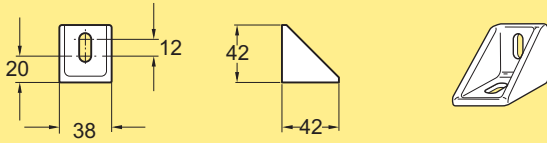


Angle bracket  
Aluminium, die-cast

**XCFA 44 B**

For use with 44×44 mm and 64×64 mm beams  
Mounting: M6S 8×16 (2), BRB 8.4×16 (2), XCAN 8 (2)

## Angle bracket, die-cast, 80×42×38

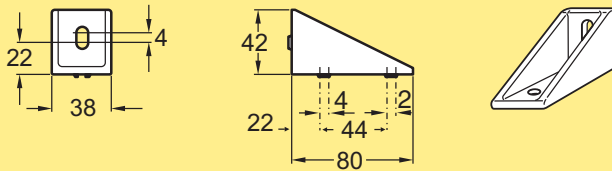


Angle bracket  
Aluminium, die-cast

**XCFA 44 C**

For use with 44×44 mm and 64×64 mm beams  
Mounting: M6S 8×16 (3), BRB 8.4×16 (3), XCAN 8 (3)

## Angle bracket, die-cast, 80×80×82

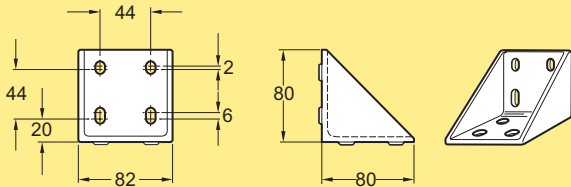


Angle bracket  
Aluminium, die-cast

**XCFA 88 A**

For use with 88×88 mm beams  
Mounting: M6S 8×16 (8), BRB 8.4×16 (8), XCAN 8 (8)

## Angle bracket, die-cast, 42×42×82

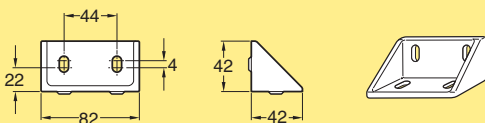


Angle bracket  
Aluminium, die-cast

**XCFA 88 B**

For use with 88×88 mm beams  
Mounting: M6S 8×16 (4), BRB 8.4×16 (4), XCAN 8 (4)

## Mounting plate 44×100

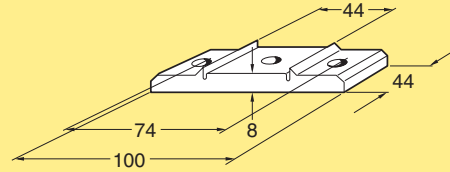


Mounting plate  
Aluminium, anodized

**XCFB 44**

For use with 44×44 mm beams (not XCBL 3/L×44).  
Mounting: M6S 8×18 (2), BRB 8.4×16 (2), XCAN 8 (2)  
+ MF6S 8×30 (1)

## Mounting plate 64×120

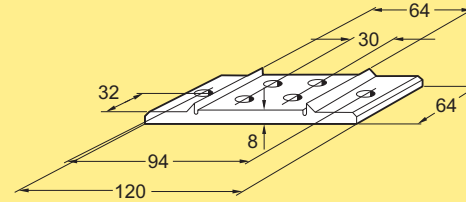


Mounting plate  
Aluminium, anodized

**XCFB 64 A**

For use with 64×64 mm XCBM type beams.  
Mounting: M6S 8×18 (2), BRB 8.4×16 (2), XCAN 8 (2)  
+ MF6S 8×30 (4)

## Mounting plate 88×145

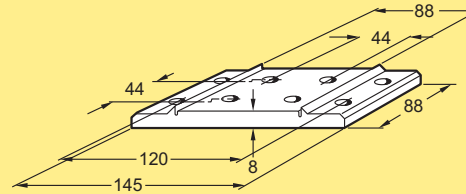

Mounting plate  
Aluminium, anodized

**XCFB 88**

For use with 88×88 mm XCBM type beams.  
Mounting: M6S 8×18 (4), BRB 8.4×16 (4), XCAN 8 (4),  
MF6S 8×30 (4). Cannot be used with XCBL beams.

**Foot 44x130**

Foot for beam XCBM/XCBL ..x44  
Aluminium, die-cast **XCFF 44x130**  
Including fastener kit  
Maximum bending moment 250 Nm

**Foot 88x260**

Foot for beam XCBM/XCBL ..x88  
Aluminium, die-cast **XCFF 88x260**  
Including fastener kit  
Maximum bending moment 1500 Nm

**Foot 64x210**

Foot for beam XCBM/XCBL ..x64  
Aluminium, die-cast **XCFF 64x210**  
Including fastener kit  
Maximum bending moment 750 Nm

Foot plates

**Foot plate for beam 44x44**


Foot plate for beam XCBM/XCBL ..x44  
Aluminium, anodized **XCFB 44 F**  
Mounting: MF6S 8x30 (1) or MF6S 6x30 (4).  
Maximum bending moment 50 Nm

**Foot plate for beam 88x88**

Foot plate for beam XCBM/XCBL ..x88  
Aluminium, anodized **XCFB 88 F**  
Mounting: MF6S 8x30 (4) or MF6S 6x30 (4).  
Maximum bending moment 200 Nm

## Adjustable feet

### Adjustable foot M8



Adjustable foot


Steel, electro-zinc-plated  
M8 thread

**XLFS 8**

Including nut. Maximum vertical load 400 N

Mounting: XCFE 44 M8

### Adjustable foot M12



Adjustable foot


Steel, electro-zinc-plated  
M12 thread

**XCFS 12x68**

Including nut. Maximum vertical load 2500 N

Mounting: XCFE .. M12.

### Adjustable foot, polyamide, M8



Adjustable foot


PA + steel, electro-zinc-plated  
M8 thread

**XCFS 8x40x43**

Maximum vertical load 12000 N

Mounting: XCFE 44 M8

### Adjustable foot, polyamide, M12



Adjustable foot

PA + steel, electro-zinc-plated  
M12 thread


**XCFS 12x60x71**

Including nut. Maximum vertical load 15000 N

Mounting: XCFE .. M12.

## End plates

### End plate for beam 44x44, M8 thread

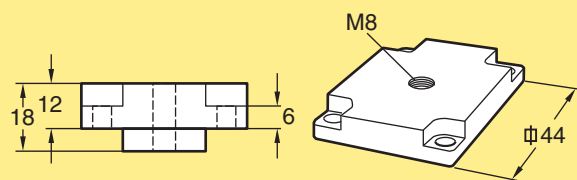


End plate for beam XCBL ...x44

M8 thread  
Zinc, die-cast

**XCFE 44 M8**

Mounting: MC6S-TT 6x30 (4)

### End plate for beam 44x44, M12 thread

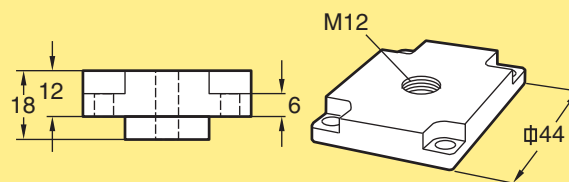

End plate for beam XCBL ...x44

M12 thread  
Zinc, die-cast

**XCFE 44 M12**

Mounting: MC6S-TT 6x30 (4)

**End plate for beam 64×64, M12 thread**

End plate for beam  
XCBL/XCBM ...×64  
M12 thread  
Zinc, die-cast

**XCFE 64 M12A**

Mounting: MC6S-TT 6×30 (4)

**End plate for beam 88×88, M12 thread**

End plate for beam  
XCBL/XCBM ...×88  
M12 thread  
Zinc, die-cast

**XCFE 88 M12A**

Mounting: MC6S-TT 6×30 (4)

**Polyamide feet**

**Three-point foot for 64 mm beam**

Three-point foot for XC.. 64 beam  
D=64 mm  
Polyamide, glass-fibre reinforced

**XEFG 64 T**

Including screws and clamps.  
Maximum vertical load 800 N.

**Foot for height adjustment assembly**

Three-point foot for XEFU 500  
D=70 mm  
Polyamide, glass-fibre reinforced

**XEFG 70 T**

Including screws and clamps.  
Maximum vertical load 800 N.  
Height adjustment assembly: see page 344.

**Two-point foot for 64 mm beam**

Two-point foot for XC.. 64 beam  
D= 64 mm  
Polyamide, glass-fibre reinforced

**XEFG 64 D**

Including screws and clamps.  
Maximum vertical load 800 N.

**Adjustable foot for XEFG**

Adjustable foot for XEFG 64/70 T/D  
With ball joint and M20 locking nut  
Polyamide, glass-fibre reinforced

**XLFS 20 P**

Maximum vertical load 500 N


**Vibration absorber**

Vibration absorber for XLFS 20 P  
Thermoplastic polyester

**XLFJ 69**

## Height adjustment assembly

### Height adjustment assembly

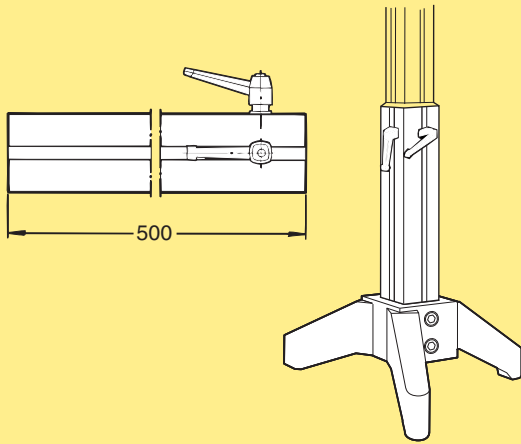

Square section tube height adjustment assembly

Length 500 mm

Aluminium, anodized


**XEFU 500**

To be used with foot type XEFG 70 T. Including locking levers.

## Beam support brackets Type CT

Selection guide: see page 338.

### Beam support bracket – diecast aluminium

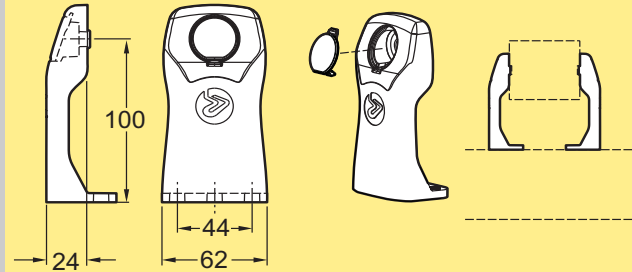

Beam support bracket, Type CT

Aluminium, diecast

**XLCT 11x100 C**

For 64 mm or 88 mm crossing support beam.

Cannot be used with drip trays

Mounting: XLAT 17 (1), XLAN 8 (1), XCAN 8 (1 or 2), M6S 8x16 (1 or 2), BRB 8.4x16 (2 or 3)


Incl. Cap 5110134 (1)

Cap, Beam support bracket

**5110196**

Kit contains 25 pcs

### Beam support bracket – aluminium



Beam support bracket, Type CT


h=135 mm, a=48,5 mm

**XLCT 21x135 B**

For 64 or 88 mm crossing support beam

Mounting: XLAT 17 (2), XLAN 8 (2), XCAN 8 (2), M6S 8x16 (2), BRB 8.4x16 (4)

### Beam support bracket – aluminium

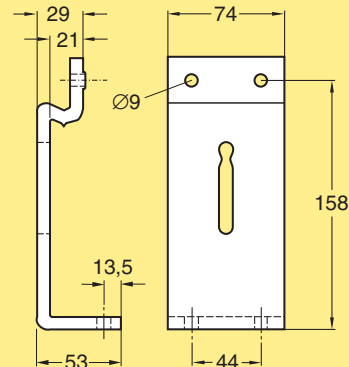


Beam support bracket, Type CT **XLCT 21x158 R**

For 88 mm crossing support beam

Mounting: XLAT 24 (2), XLAN 8 (2), XCAN 8 (2), M6S 8x16 (2), BRB 8.4x16 (4)

Selection guide: see page 338.

## Beam support bracket – aluminium, for 44 mm vertical support beam



Beam support bracket, Type CS

For XS conveyor. Fig. A, C

For X65 conveyor. Fig. B, C


**XSCS 44**

**XLCS 44**

For 44 mm vertical support beam

Mounting: XLAT 17 (1), XLAN 8 (1), XCAN 8 (2), M6S 8x16 (2), BRB 8.4x16 (3)

## Beam support bracket, diecast aluminium, for 64 mm vertical support beam

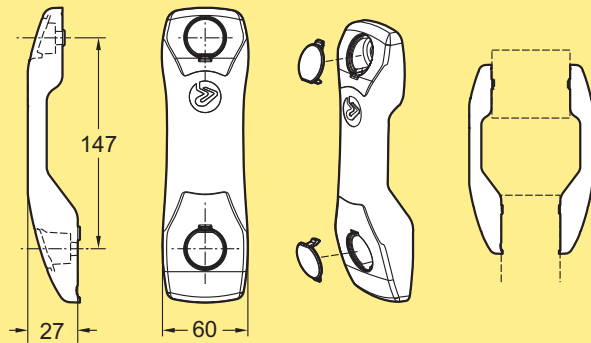

Beam support bracket for X65,

Type CS

Aluminium, diecast

**XLCS 64 C**

For 64 mm vertical support beam


Cannot be used with drip trays

Mounting: XLAT 17 (1), XLAN 8 (1), XCAN 8 (1), M6S 8x16 (1), BRB 8.4x16 (2)

For support of X65 X-bend, order M6S 8x16 screw instead of the XLAT 17 T-slot screw.

Incl. Cap 5110134 (2)

## Beam support bracket, diecast aluminium, for 64 mm vertical support beam

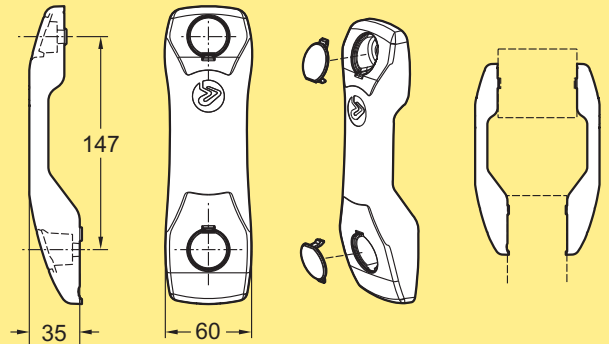

Beam support bracket for X85,

Type CS

Aluminium, diecast

**XMCS 64 C**

For 64 mm vertical support beam

Cannot be used with drip trays

Mounting: XLAT 17 (1), XLAN 8 (1), XCAN 8 (1), M6S 8x16 (1), BRB 8.4x16 (2)

For support of X85 X-bend, order M6S 8x16 screw instead of the XLAT 17 T-slot screw.


Incl. Cap 5110134 (2)

Cap, Beam support bracket

**5110196**

Kit contains 25 pcs

## Beam support bracket – aluminium, for 64 mm vertical support beam

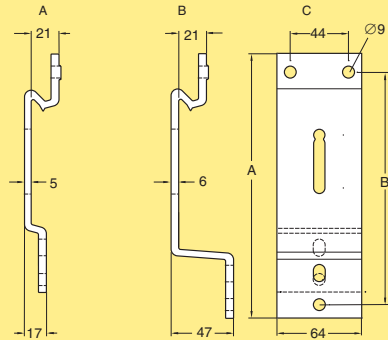

Beam support bracket, Type CS

For XS conveyor. Figure A, C

A=180 mm, B=156 mm

**XSCS 64**

For XH conveyor. Figure B, C

A=200 mm, B=176 mm


**XHCS 64 B**

For 64 mm vertical support beam

Mounting: XLAT 17 (2), XLAN 8 (2), XCAN 8 (2), M6S 8x16 (2), BRB 8.4x16 (4)

PO  
CC  
X45  
XS  
X65  
X65P  
X85  
X85P  
XH  
XK  
XKP  
X180  
X300  
GR  
CS  
XT  
HU  
WL  
WK  
XC  
XF  
XD  
ELV  
SC  
FST  
TR  
APX  
IDX

**Beam support bracket – aluminium, for 88 mm vertical support beam**

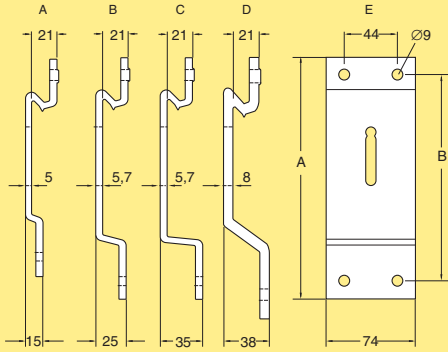

**Beam support bracket, Type CS**

For X65 conveyor. Fig. A, E  
A=180 mm, B=151 mm **XLCS 88**

For X85 conveyor. Fig. B, E  
A=200 mm, B=171 mm **XMCS 88 B**

For XH conveyor. Fig. C, E  
A=200 mm, B=171 mm **XHCS 88 B**


For XK conveyor. Fig. D, E  
A=219 mm, B=190 mm **XKCS 88 R**

*For 88 mm vertical support beam  
Mounting: XLAT 17 (2), XLAN 8 (2), XCAN 8 (2), M6S 8x16 (2), BRB 8.4x16 (4)  
Use T-slot screw XLAT 24 (2) and M6S 8x18 (2) with XKCS 88 R. (XLAT 17 and M6S 8x16 are too short.)*

**Beam support brackets Type CS, polyamide**

Selection guide: see page 338.

**Beam support bracket – polyamide**

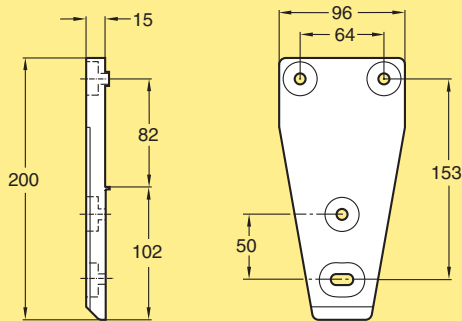


**Beam support bracket, Type CS **XLCS 64 P****

*For X65 conveyor with 64 mm vertical support beam.  
Also suitable for XS conveyor with 44 mm vertical support beam*

*Mounting: XLAT 17 (2), XLAN 8 (2), XCAN 8 (2), M6S 8x16 (2), BRB 8.4x16 (4)*

**Beam support bracket – polyamide**

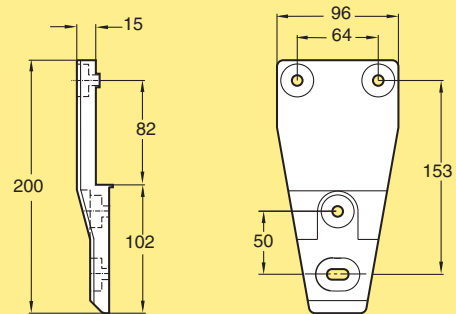

**Beam support bracket, Type CS **XMCS 64 P****

*For X85 conveyor with 64 mm vertical support beam.  
Also suitable for X65 conveyor with 44 mm vertical support beam*

*Mounting: XLAT 17 (2), XLAN 8 (2), XCAN 8 (2), M6S 8x16 (2), BRB 8.4x16 (4)*

**Nut cover plug**

Nut cover plug **XLAE 26**  
 For polyamide beam support brackets  
 Note. Contains 10 pcs.

**Nut cover plug for elongated hole**

Nut cover plug for elongated hole **XLAE 26 E**  
 For polyamide beam support brackets  
 Note. Contains 10 pcs.

Selection guide: see page 338.

**Beam support bracket – aluminium**


Beam support bracket, Type CU **XLCU 73**  
 For support of 180° wheel bend with 88 mm vertical support beam. For conveyor systems X65, X85, XH  
 Mounting: XLAT 17 (2), XLAN 8 (2), XCAN 8 (4), M6S 8x16 (4), BRB 8.4x16 (6)

**Beam support bracket – aluminium**

Beam support bracket, Type CU **XLCU 103**  
 For support of 180° wheel bend with 88 mm vertical support beam. For conveyor system XK  
 Mounting: XLAT 24 (2), XLAN 8 (2), XCAN 8 (4), M6S 8x16 (4), BRB 8.4x16 (6)

# Beam support brackets X45, diecast

## Beam support bracket for horizontal support beam

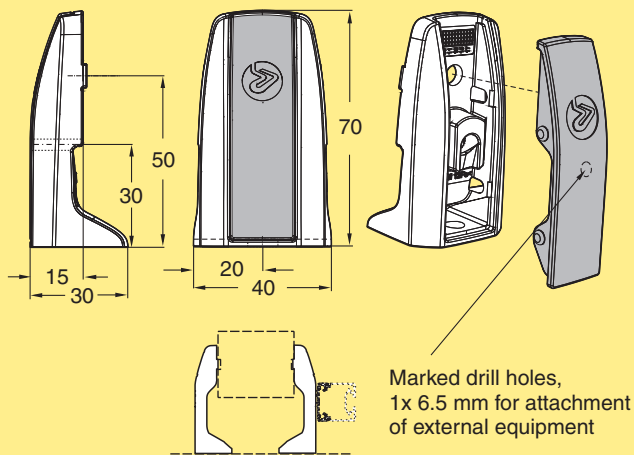


Marked drill holes,  
1x 6.5 mm for attachment  
of external equipment

Beam support bracket  
Aluminium, diecast

**XUCT 50**

For 44 mm crossing support beam.  
Including mounting hardware.

## Beam support bracket for 44 mm vertical support beam

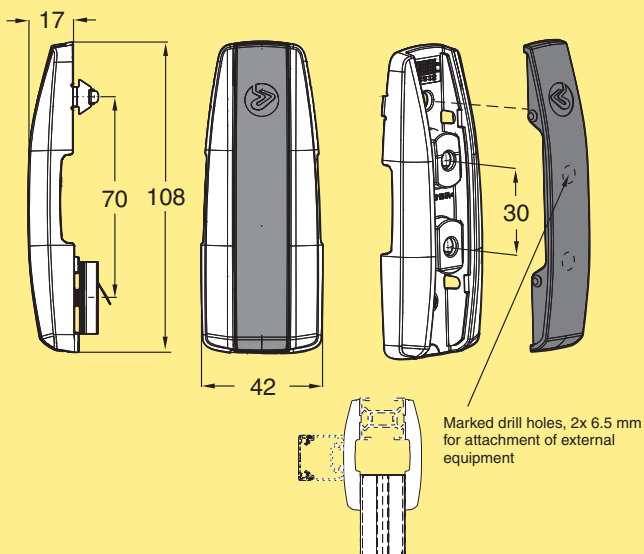

Marked drill holes, 2x 6.5 mm  
for attachment of external  
equipment

Beam support bracket  
Aluminium, diecast

**XUCS 44**

For 44 mm vertical support beam  
Including mounting hardware.