

Modular plastic belt conveyor WK

Contents

System information.....	455	Drive units – introduction.....	463	
Belts – introduction.....	456	End drive units, direct drive, slip clutch.....	465	X45
Belts.....	457	Idler end units – introduction.....	466	
Conveyor sections.....	458	Idler units.....	466	XS
Conveyor frame components – introduction.....	459	Support designs.....	467	
Conveyor frame components.....	460			X65


System information



Wide conveyor for transport and accumulation

The added advantage of a wide belt (up to 1200 mm) permits effective transport and accumulation in several different configurations. Many accessory components of the original FlexLink system will fit, including guide rail components and supports. Most components are attached by means of T-slot fasteners, ensuring maximum flexibility. Nothing is welded. Only a minimum of cutting and drilling will be required to install a conveyor and have it running.

Belt width 150/225/300/600/900/1200 mm

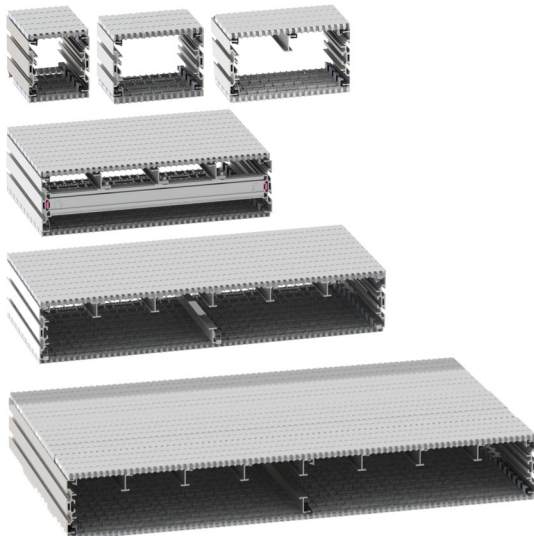

Typical applications

The WK conveyor system is designed for transport and accumulation of lightweight goods such as:


- Bearings
- Gear wheels
- Cylindrical products
- Bottles

Technical specifications

Maximum speed.....	40 m/min
Maximum conveyor length.....	20 m
Product weight.....	up to 30 kg
Total load.....	up to 250 kg
Max. product weight per belt pitch.....	2,5 kg/slide rail
Belt tension limit.....	1250 N

P0
CC
X45
XS
X65
X65P
X85
X85P
XH
XK
XKP
X180
X300
GR
CS
XT
HU
WL
WK
XC
XF
XD
ELV
CTL
FST
TR
APX
IDX

Belts – introduction

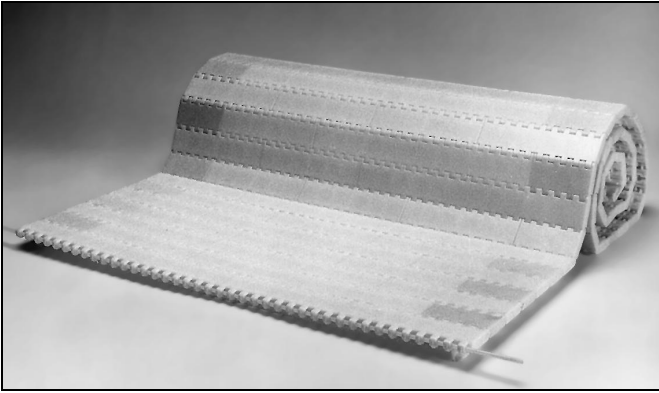

Tools and accessories

No special tools are required. The belt is lubrication-free. A new belt running on new slide rails, however, will need a few hours of running-in before it runs perfectly smoothly. For applications where absolutely smooth running is essential from start, use a silicone or teflon based lubricant.



Ordering information

The belt is delivered in assembled 1 m lengths one plastic rod and two guide clips are included. To calculate the total length required, remember to add for belt consumed by the idler and drive units.

Links and plastic rods

The belt consists of plastic hinge-type links connected by plastic rods and locked by plastic snap-in guide clips. The clips also serve as lateral chain guides. See photo.

The belt is woven together by 75 mm and 150 mm wide links. The assembled belt forms a wide, flat and tight conveyor surface. Six standard widths of belt can be delivered, from 150 mm up to 1200 mm. The 900 mm and 1200 mm wide belt come equipped with guide clips at the centre, in addition to those at the edges.

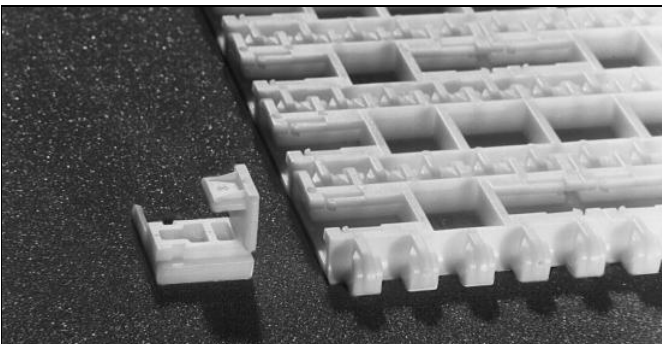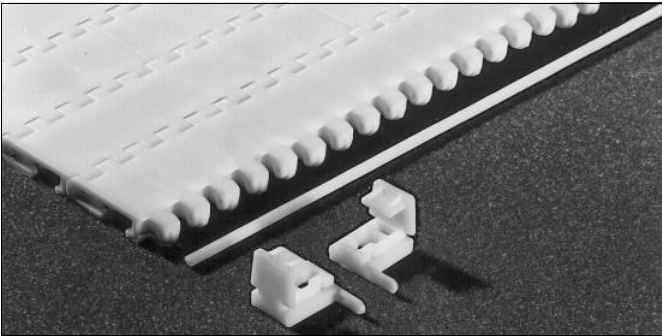

Belt components

Technical characteristics

Belt width	150/225/300/600/ 900 and 1200 mm
Belt weight (Acetal)	10,66 kg/m ²
Belt pitch	38,1 mm
Max. permissible belt tension	1250 N
Temperature range (Acetal)	-20 °C to +40 °C (Request for quotation other temperatures)

Belts 150 mm

Belt 150 mm
Length 1 m

WKTP 1B150

Belts 225 mm

Belt 225 mm
Length 1 m

WKTP 1B225

Belts 300 mm

Belt 300 mm
Length 1 m

WKTP 1B300

Belts 600 mm

Belt 600 mm
Length 1 m

WKTP 1B600

Belts 900 mm

Belt 900 mm
Length 1 m

WKTP 1B900

Belts 1200 mm

Belt 1200 mm
Length 1 m

WKTP 1B1200

Belts rod


Belt rod
Length 3 m

WKTD 5x3000 P

Belts guide clip

Belt guide clip, right **3904683**
Belt guide clip, left **3904684**

CC
X45
XS
X65
X65P
X85
X85P
XH
XK
XKP
X180
X300
GR
CS
XT
HU
WL
WK
XC
XF
XD
ELV
CTL
FST
TR
APX
IDX

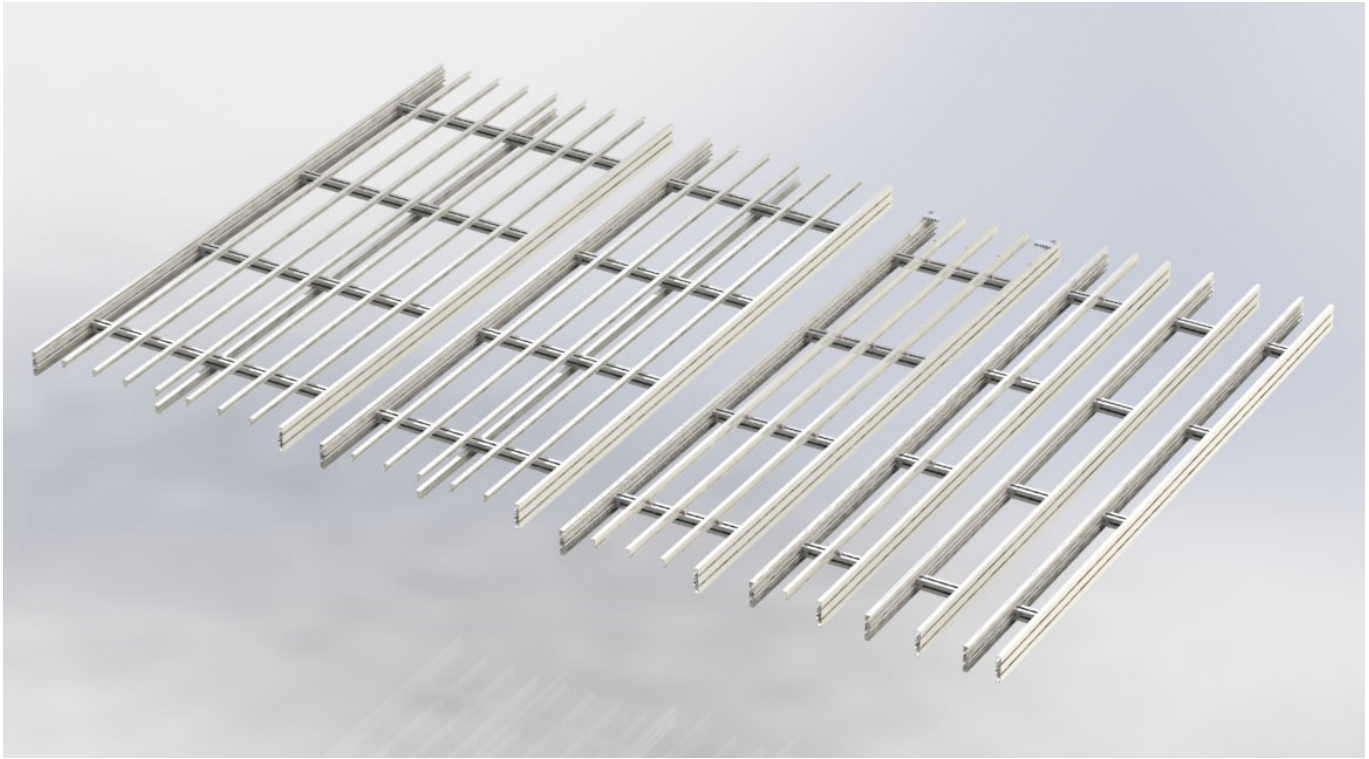

The modular plastic belt conveyor in six widths – 150, 225, 300, 600, 900, 1200, – straight sections.



Conveyor frame structure

Frame profiles and cross bars

Conveyor frame sections consist of the following components:

- Frame profile (3 m or cut to any length from 0,5 m up to 3 m)
- Centre support profile
- Beam for cross bar
- Fastener yoke
- Mounting hardware

Conveyor dimensions

	WK 150	WK 225	WK 300	WK 600	WK 900	WK 1200
Conveyor width A (mm)	153	227	302	602	901	1200
Usable belt width B (mm)	149	224	299	597	896	1195
Top of chain:						
Standard belt WKTP 1B_	68 mm					


Each 3 m frame section consists of two frame profiles connected by four cross bars. The conveyor chain slides on the top edges of the frame profiles, and returns on the bottom side. Plastic slide rails ensure a low friction contact between chain and conveyor frame.

One or more centre support profiles is used to prevent the centre portion of the chain from sagging with heavy loads. Suggested support layouts are shown on page 468. For other support components refer to catalogue section *Conveyor support components*.

Technical specifications

Typical friction between chain and slide rails after run-in:

XWCR 25 U	0,25
XWCR 25 P	0,30
WKCR 25 H	0,25

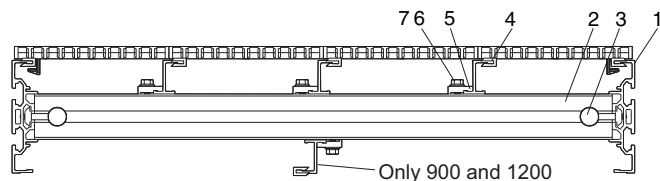

Cross-section of conveyor frame

Pos	Part number	Description
1	XKCF L	Half beam
2	XCBL Lx44	Beam spacer
3	XCAF 44	Fastener yoke
4	WKCNL	Support profile
5	XWCP 20	Cleat
6	XCAN 6	Nut
7	M6SF M6x16 fzb	Screw

Minimum conveyor length


Minimum conveyor length, Straight section	Width	L1
	150	1244
	225	
	300	
	600	
	900	
	1200	

Ordering information

Slide rail, connecting strips, and connecting sleeves must be ordered separately.

Conveyor frame components


Conveyor beam

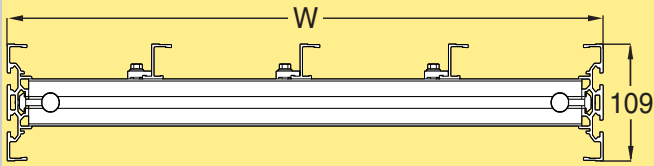

Conveyor beam, W=150	
Length 3000 mm	WKCB 3B150
Length to order (500- 3000 mm)	WKCB LB150
Conveyor beam, W=225	
Length 3000 mm	WKCB 3B225
Length to order (500- 3000 mm)	WKCB LB225
Conveyor beam, W=300	
Length 3000 mm	WKCB 3B300
Length to order (500- 3000 mm)	WKCB LB300
Conveyor beam, W=600	
Length 3000 mm	WKCB 3B600
Length to order (500- 3000 mm)	WKCB LB600
Conveyor beam, W=900	
Length 3000 mm	WKCB 3B900
Length to order (500- 3000 mm)	WKCB LB900
Conveyor beam, W=1200	
Length 3000 mm	WKCB 3B1200
Length to order (500- 3000 mm)	WKCB LB1200

The beam section is delivered unassembled.


Connecting strip

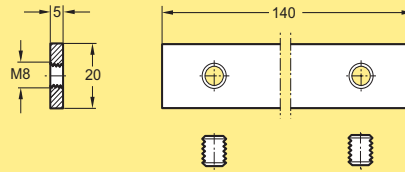

Connecting strip with set screws **XLCJ 5x140**


Note. Contains 10 pcs.

Conveyor frame profile




Frame profile
 Length 3000 +10/-0 mm **WKCF 3**
 Length to order (30- 3000 mm) **WKCF L**

Centre support profile

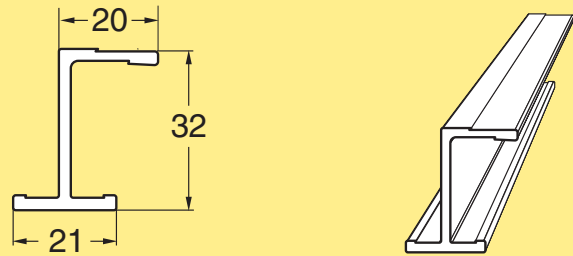

Centre support profile
 Length 3000 +10/-0 mm **WKN 3**
 Length to order (30- 3000 mm) **WKN L**


Connecting sleeve

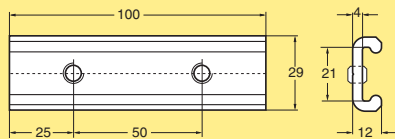

Connecting sleeve **XLRJ 100**

Including set screws. For connecting support profiles end to end.


Connecting strip

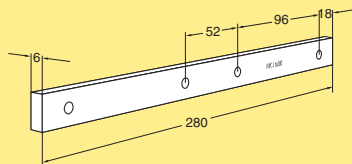

Connecting strip **XWCJ 6x280**

Length 280 mm
 Including set screws


Cleat

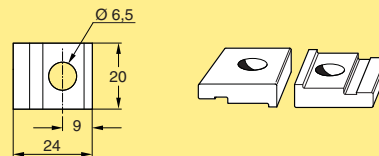

Cleat **XWCP 20**

Mounting:
 One each of MC6S 6x14, BRB 6.4x12, XCAN 6

Slide rail



Slide rail, length 25 m
UHMW-PE
PVDF
PA-PE

XWCR 25 U
XWCR 25 P
WKCR 25 H


Plastic screw for slide rail

XWAG 5*

**Note. Contains 50 pcs.*

- PO
- CC
- X45
- XS
- X65
- X65P
- X85
- X85P
- XH
- XK
- XKP
- X180
- X300
- GR
- CS
- XT
- HU
- WL
- WK**
- XC
- XF
- XD
- ELV
- CTL
- FST
- TR
- APX
- IDX

Aluminium rivets for anchoring of slide rail



Aluminium rivets 4 mm for XK-X180/X300 conveyors, brown

XLAH 4x7

Extra slide rail in plain bends must be anchored using plastic screws due to lack of space for the rivet crimping tool.

Note. Contains 250 pcs..

Components for cross bar


The following components from FlexLink structural system XC are used to build the crossbar.

Beam for cross bar
Fastener yoke
Slot nut for M6 screw

XCBL 3x44
XCAF 44
XCAN 6*

**Note. Contains 10 pcs.*


Support beam 44x44, lightweight

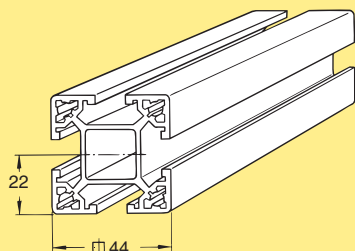

Beam 44 mm x 44 mm
Lightweight design
Aluminium, anodized
Length 3000 mm
Length to order

XCBL 3x44
XCBL Lx44


Fastener yoke 44 mm



Fastener yoke assembly
Length 44 mm
Zinc, die-cast

XCAF 44

Cover strip for T-slot, PVC




Cover strip for T-slot
Length 3 m
Grey PVC

XCAC 3 P

Note! Can't be used with bends


Cover strip for T-slot, PVC

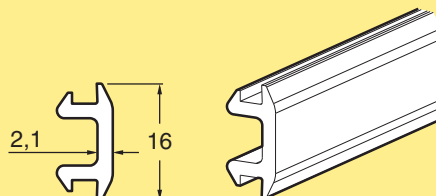

Cover strip for T-slot
Length 25 m
Grey PVC

XCAC 25 P


Cover strip for T-slot, aluminium



Cover strip for T-slot
Aluminium, anodized
Length 2 m

XCAC 2

Note! Can't be used with bends

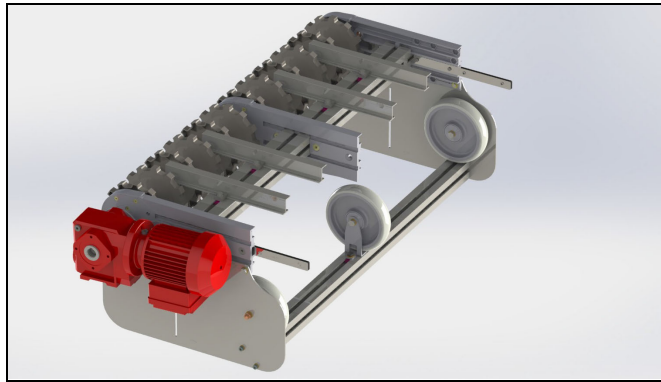



End drive unit

Drive unit types

The WK system includes direct driven units with or without slip clutch. Available motors include variable speed types (V) as well as fixed speed motors (F).

End drive units

Size	Direct drive, no slip clutch	Direct drive, slip clutch
Drive unit types	 F, V	 F, V

Motor specifications

Motors are available for 230/400 V, 50 Hz and 230/460 V, 60 Hz. Variable speed motors are SEW Movimot, 380–500 V. Note that variable speed motors include a control box that adds 120 mm to the width of the motor.

IP55 available with standard oil.
 IP65 available with food grade oil.

Technical specifications

Maximal speed..... 40 m/min
 Number of teeth on sprocket wheel... 12

Number of sprocket wheels vs. conveyor width

Width	150 mm	225 mm	300 mm	600 mm	900 mm	1200 mm
Sprocket wheels	1	1 1/2	2	4	6	8

Ordering information

Drive units with motors must be specified using the web-based configurator. The configurator provides detailed information and step-by-step guidance in the specification process. A product code string is generated, containing the specification details. See next page for examples of code strings.

Drive units *without* motors can be ordered using the designations in the catalogue.

- Connecting strips are included with the drive units.
- Slide rail must be ordered separately.


Dimension

Note that dimensions relating to drive unit motors depend on the motor specified during the configuration.

PO
 CC
 X45
 XS
 X65
 X65P
 X85
 X85P
 XH
 XK
 XKP
 X180
 X300
 GR
 CS
 XT
 HU
 WL
WK
 XC
 XF
 XD
 ELV
 CTL
 FST
 TR
 APX
 IDX

End drive units, direct drive, no slip clutch

End drive unit L/R

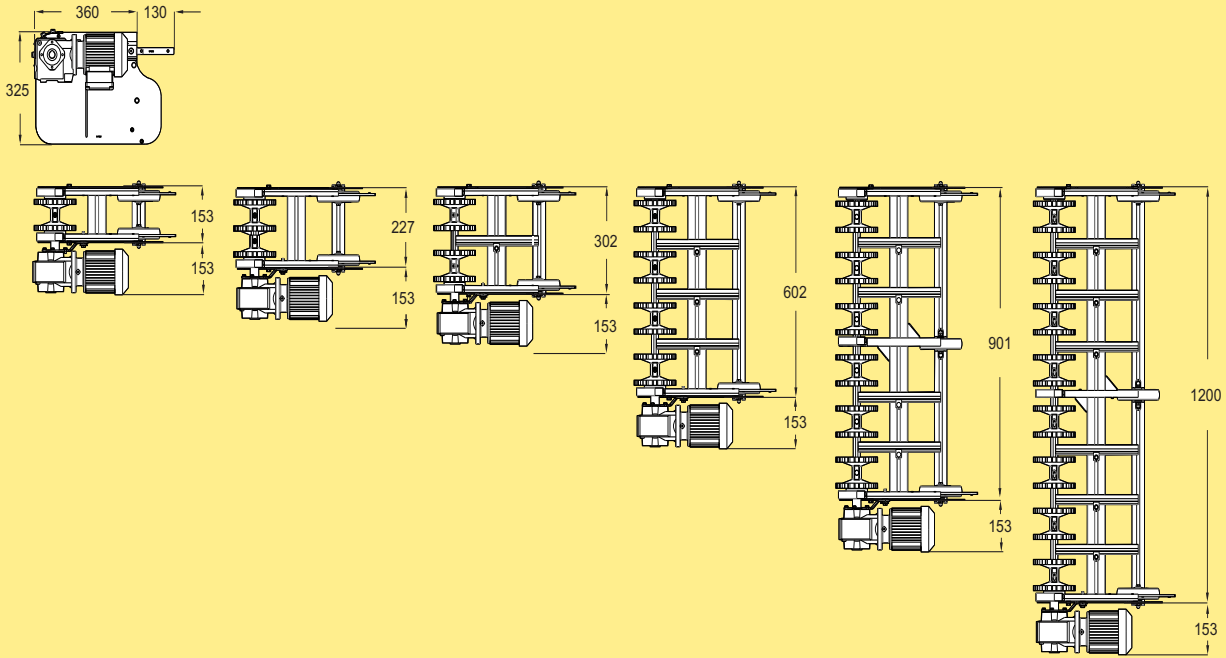

End drive unit

Fixed/variable speed*, width 150 mm

Without motor:

Transmission on left side

Transmission on right side

WKEB B150

WKEB 0B150NLP

WKEB 0B150NRP

End drive unit

Fixed/variable speed*, width 225 mm

Without motor:

Transmission on left side

Transmission on right side

WKEB B225

WKEB 0B225NLP

WKEB 0B225NRP

End drive unit

Fixed/variable speed*, width 300 mm

Without motor:

Transmission on left side

Transmission on right side

WKEB B300

WKEB 0B300NLP

WKEB 0B300NRP

End drive unit

Fixed/variable speed*, width 600 mm

Without motor:

Transmission on left side

Transmission on right side

WKEB B600

WKEB 0B600NLP

WKEB 0B600NRP

End drive unit

Fixed/variable speed*, width 900 mm

Without motor:

Transmission on left side

Transmission on right side

WKEB B900

WKEB 0B900NLP

WKEB 0B900NRP

End drive unit

Fixed/variable speed*, width 1200 mm

Without motor:

Transmission on left side

Transmission on right side


WKEB B1200

WKEB 0B1200NLP

WKEB 0B1200NRP

* Use online configurator when ordering
Effective track length: 0,80 m

End drive unit L/R

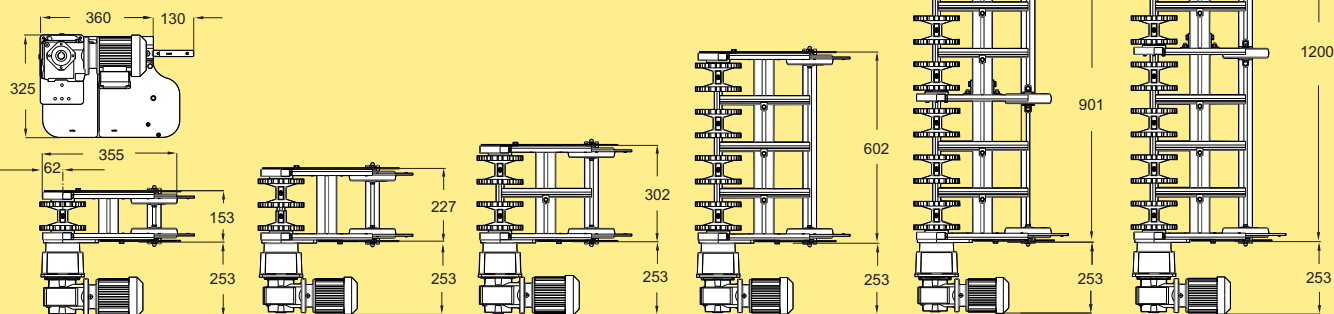

End drive unit
Fixed/variable speed*, width 150 mm
Without motor:
Transmission on left side
Transmission on right side

WKEB B150

WKEB 0B150LP
WKEB 0B150RP

End drive unit
Fixed/variable speed*, width 225 mm
Without motor:
Transmission on left side
Transmission on right side

WKEB B225

WKEB 0B225LP
WKEB 0B225RP

End drive unit
Fixed/variable speed*, width 300 mm
Without motor:
Transmission on left side
Transmission on right side

WKEB B300

WKEB 0B300LP
WKEB 0B300RP

End drive unit
Fixed/variable speed*, width 600 mm
Without motor:
Transmission on left side
Transmission on right side

WKEB B600

WKEB 0B600LP
WKEB 0B600RP

End drive unit
Fixed/variable speed*, width 900 mm
Without motor:
Transmission on left side
Transmission on right side

WKEB B900


WKEB 0B900LP
WKEB 0B900RP

End drive unit
Fixed/variable speed*, width 1200 mm
Without motor:
Transmission on left side
Transmission on right side

WKEB B1200

WKEB 0B1200LP
WKEB 0B1200RP

* Use online configurator when ordering
Effective track length: 0,80 m

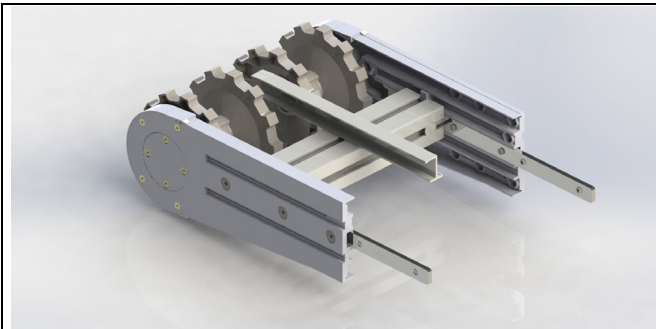

Idler end unit

Chain guidance at end of conveyor

The idler end unit is used to guide the chain from the return side of the conveyor up to the top side with a minimum of friction. The chain is guided by two or more idler wheels on a common, rotating shaft supported by ball bearings.

Number of idler wheels vs. conveyor width

Width	150 mm	225 mm	300 mm	600 mm	900 mm	1200 mm
Idler wheels	1	1 1/2	2	4	6	8

Ordering information

- Connecting strips are included with the idler end units.
- Slide rail must be ordered separately.

Idler units

Idler end unit

Idler end unit, width 150 mm	WKEJ 150 B
Idler end unit, width 225 mm	WKEJ 225 B
Idler end unit, width 300 mm	WKEJ 300 B
Idler end unit, width 600 mm	WKEJ 600 B
Idler end unit, width 900 mm	WKEJ 900 B
Idler end unit, width 1200 mm	WKEJ 1200 B
<i>Effective track length: 0,80 m</i>	


Support designs

Support components

The illustrations on this page show recommended supports for the conveyor. All supports are built using components from FlexLink structural system XC. See main catalogue section *Conveyor support components* for more information.

Height and width of supports Type 1, 2


	WK150	WK225	WK300	WK600	WK900	WK1200
W1 (mm)	153	227	302	602	901	1200
L1 (mm)	ca. H1-92	ca. H1-92	ca. H1-92	ca. H1-92	ca. H1-92	ca. H1-92
W2 (mm)	--	100	175	475	774	1073
L2 (mm)	ca. H2-276	ca. H2-276	ca. H2-276	ca. H2-276	ca. H2-276	ca. H2-276

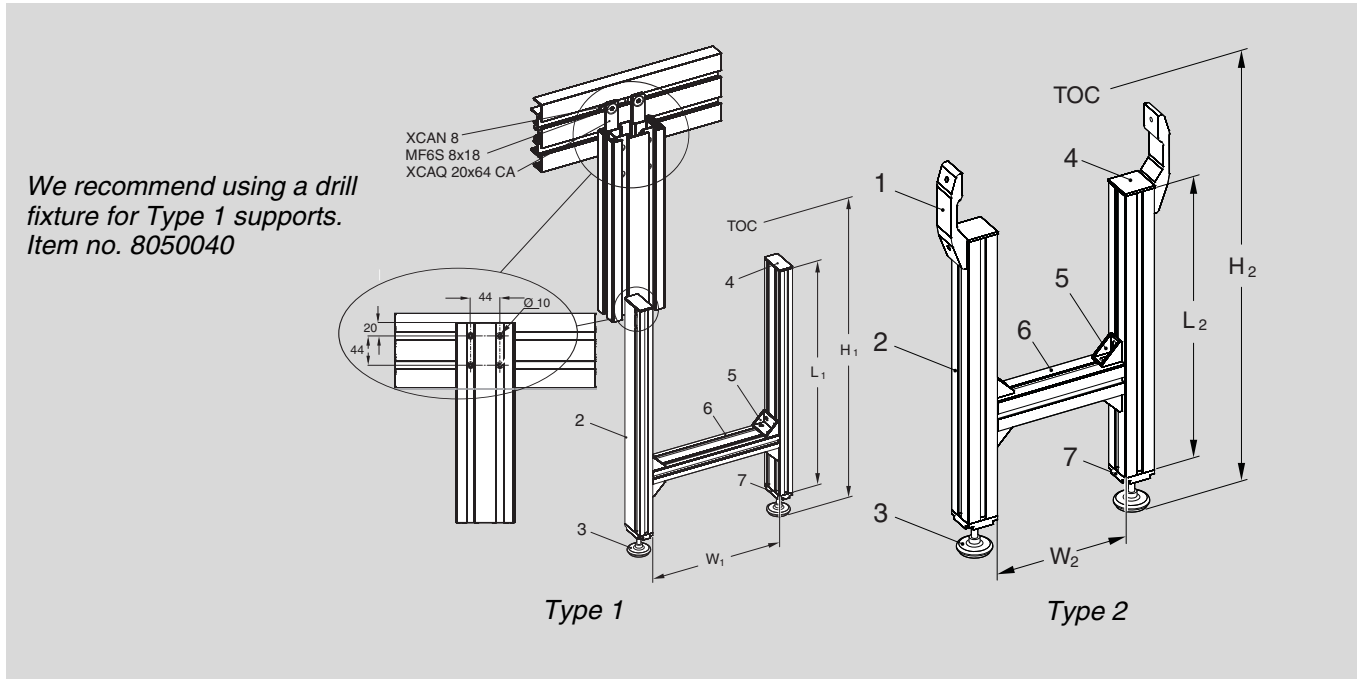

Suggested support components

Pos	Item	Designation	
		Type 1	Type 2
1	Beam support bracket	–	XLCS 64 C
2	Leg support	XCBL 3x44x88	XCBL 3x64
3	Foot	XCFS 12x68	XCFS 12x68
4	End cap	XCBE 44x88	XCBE 64
5	Angle bracket	XCFA 88 B	XCFA 44 B
6	Cross beam	XCBL 3x44x88	XCBL 3x64
7	End plate for beam	XCFE 44x88 M12A	XCFE64 M12A

Drill fixture

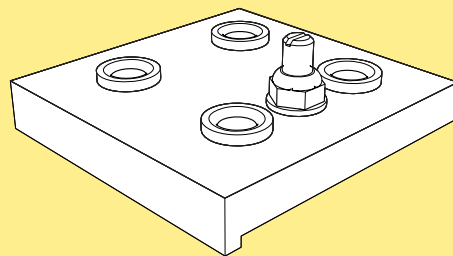

Drill fixture

8050040