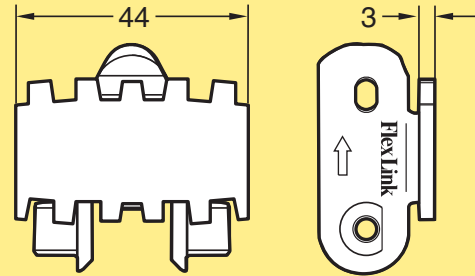
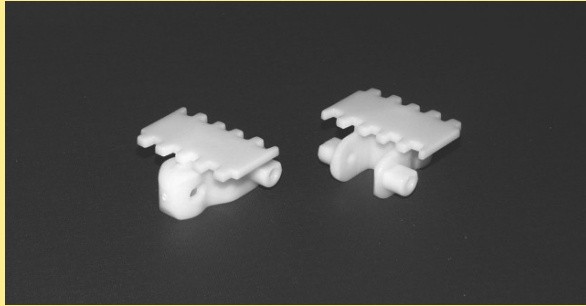


# Conveyor system XS - links and chains

Each link kit contains 10 links, 10 plastic pivots, and 10 stainless steel pins, unless otherwise specified.

Material abbreviations: See page III.

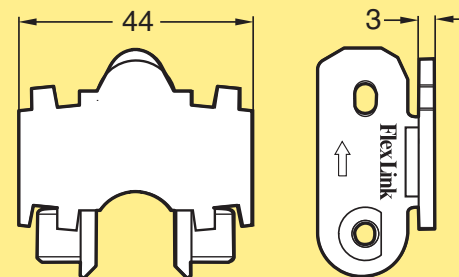
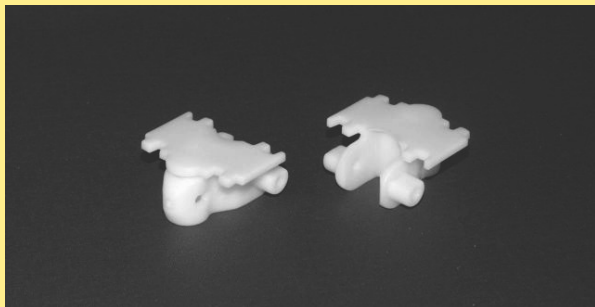
## Plain chain



Small products, e.g. medicine bottles.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XSTP 5	XSTL 44	5056061		12 g	POM A	See page III
3921434	3921433	5056611		12 g	POM B	See page III
3927342	3927341	5056612		12 g	POM A GY	See page III
3926403	3926404	5056613		12 g	POM A BK	See page III
3925932	3925931	5056614		12 g	POM B ISD NAT	PA66 ISD
XSTP 5 E	XSTL 44 E	5056062		12 g	POM A COND	PA66 ISD
3903463	3902401	5056615		12 g	PBT	See page III
3903455	3903454	5056616		12 g	PVDF	See page III
3927479	3927478	5114627		12 g	POM B ISD GY	PA66 ISD
XSTP 5 C	5111000			12 g	POM D	See page III

## Plain chain (narrow gap)



To prevent small products from getting caught in between teeth.


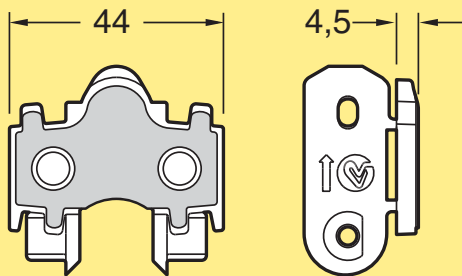
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3905816	3905815	5056617		12 g	POM A	See page III
3905634	3905633	5056618		12 g	POM A BK	See page III

## Universal chain

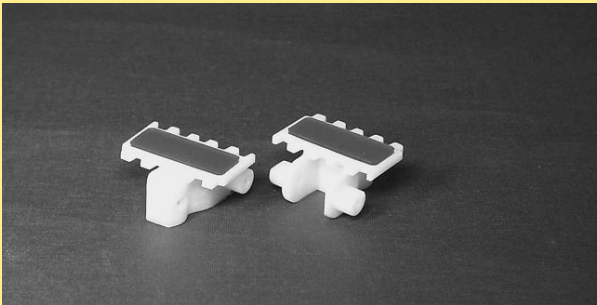
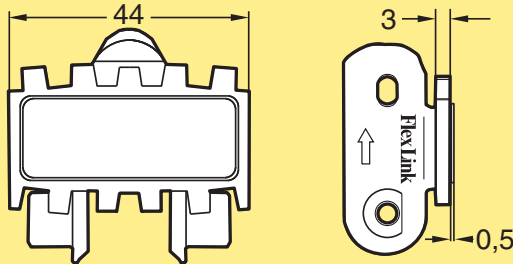
Top attach customer specific cleat or fixture.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XSTF 5 U...	XSTL 44 U	5056059		13 g	POM A	See page III

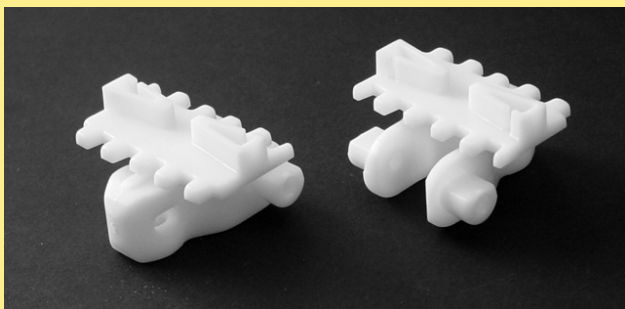
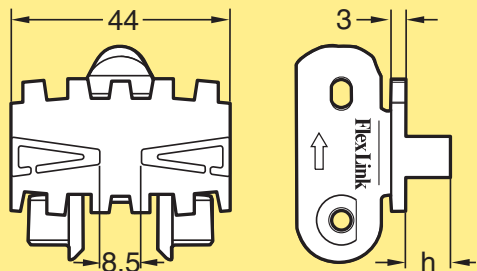
## Steel top chain, fingered

						
Top attach customer specific cleat or fixture.						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XSTP 5 TF	XSTL 44 TF	5056634		24 g	POM A + SS	See page III

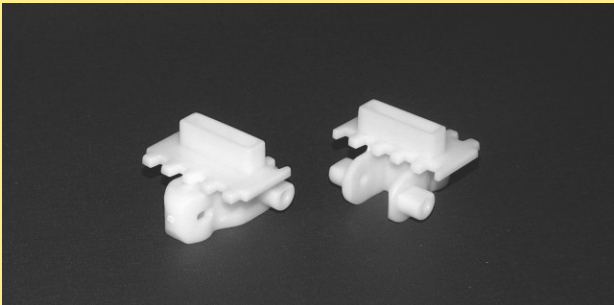
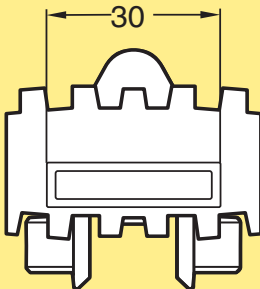
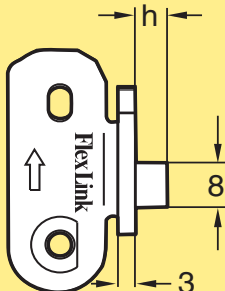
## Friction top chain

						
Slope 25°						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XSTP 5 F...	XSTL 44 F	5056060		13 g	POM A	See page III

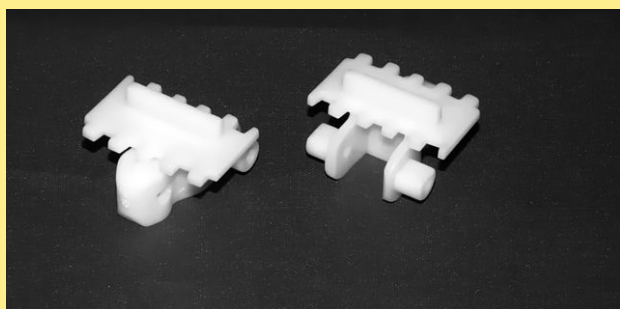
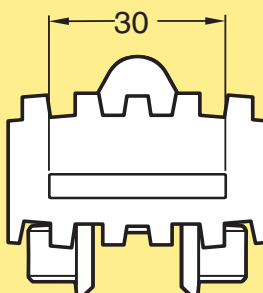
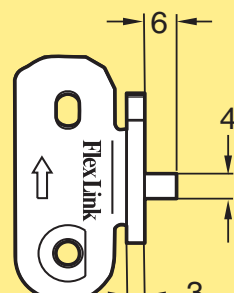
## Cleated chain

						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XSTF 5X5,5 A	XSTL 44X5,5 A	5056048	h=5.5 mm	13 g	POM A	See page III
XSTF 5X9 A...	XSTL 44X9 A	5056046	h=9 mm	14 g	POM A	See page III

## Cleated chain

						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XSTF 5X3 D...	XSTL 44X3 D	5056052	h=3 mm	13 g	POM A	See page III
XSTF 5X5,5 D...	XSTL 44X5,5 D	5056049	h=5.5 mm	13 g	POM A	See page III
XSTF 5X9 D...	XSTL 44X9 D	5056045	h=9 mm	14 g	POM A	See page III
XSTF 5X27 D...	XSTL 44X27 D	5056053	h=27 mm	18 g	POM A	See page III

## Cleated chain

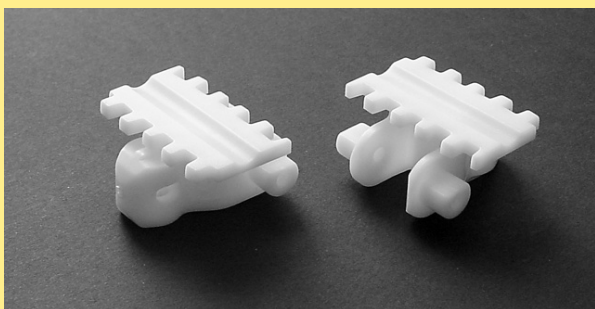
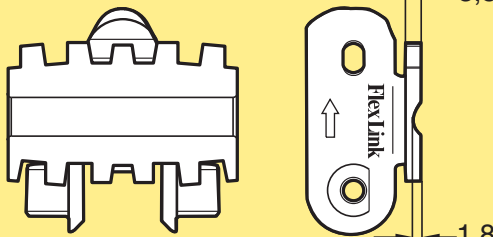
						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5051181 PAR...	5051183	5056619		13 g	POM A	See page III

## Cleated chain

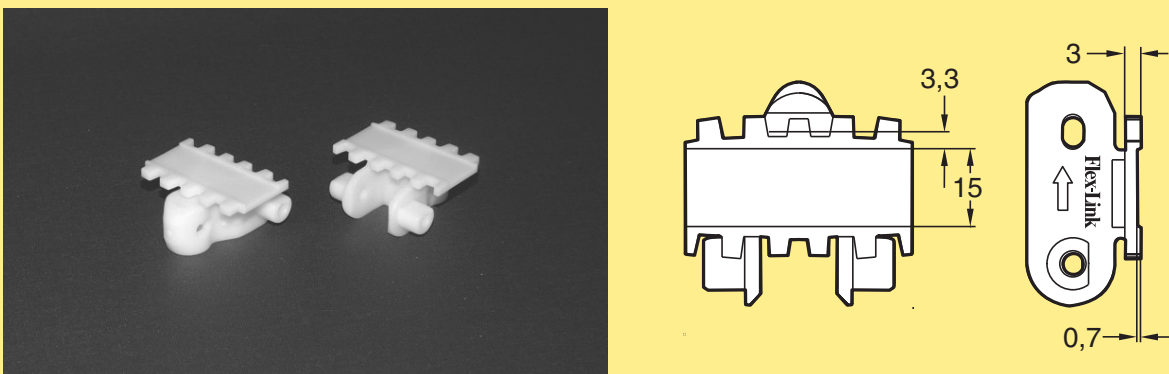
Only for drive unit type XSEB HL/HR. PBT version is suitable for cigarette transport.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3924150	3902430	5056620		14 g	POM A	See page III
3905798	3905797	5056621		14 g	PBT	See page III

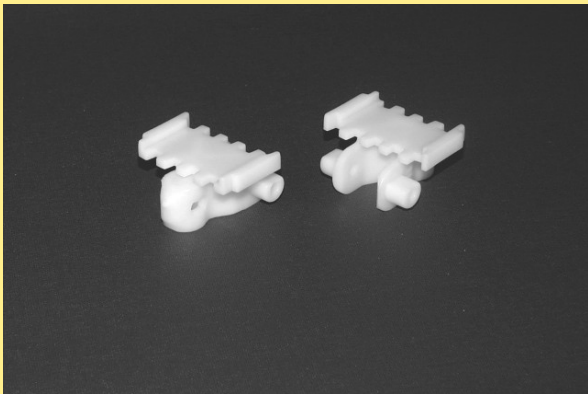
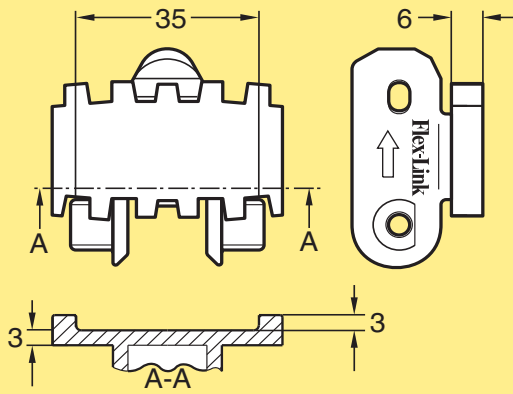
## Cleated chain

						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5048339	5048338	5056622		13 g	POM A	See page III

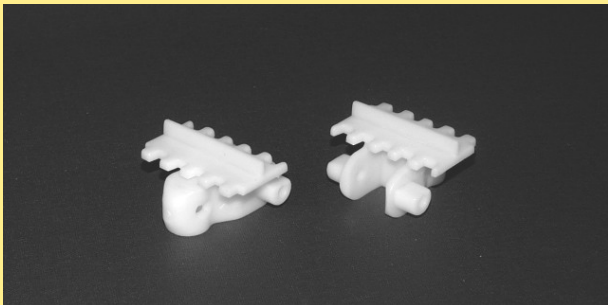
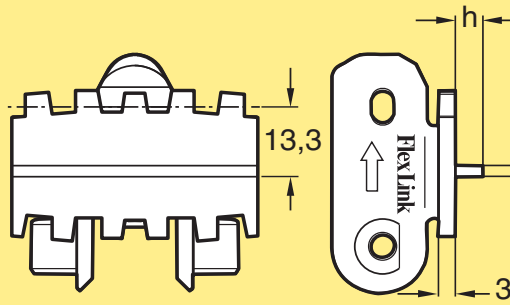
## Cleated chain

						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3904484	3903724	5056623		12 g	POM A	See page III

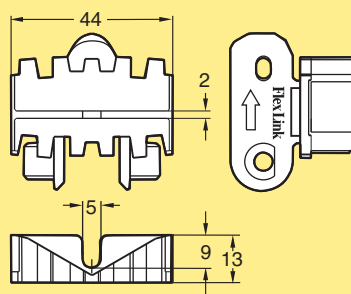
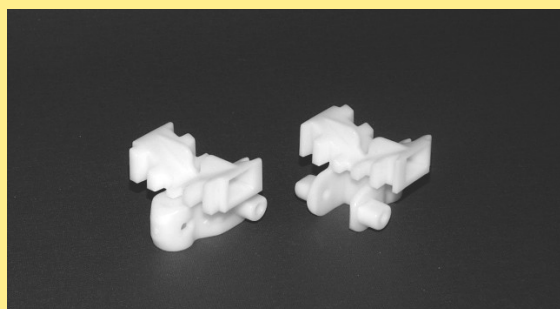
## Chain with elevated edges

 						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3924151	3902436	5056624		13 g	POM A	See page III
*5115308	5115303	*5115309	Version right		POM A	See page III
*5115310	5115305	*5115311	Version left		POM A	See page III
*Only to be used with special guided XS drive unit made from XL side plates						

## Cleated chain

 						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XSTF 5X3 G...	XSTL 44X3 G	5056051	h=3 mm w=44 mm	13 g	POM A	See page III
XSTF 5X5 G...	XSTL 44X5 G	5056050	h=5 mm w=44 mm	13 g	POM A	See page III
XSTF 5X9 G...	XSTL 44X9 G	5056043	h=9 mm w=44 mm	13 g	POM A	See page III
5117326	5117237	5117532	h=9 mm w=36 mm		POM A	See page III

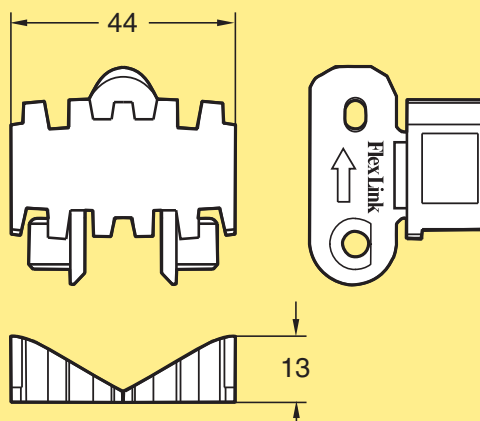
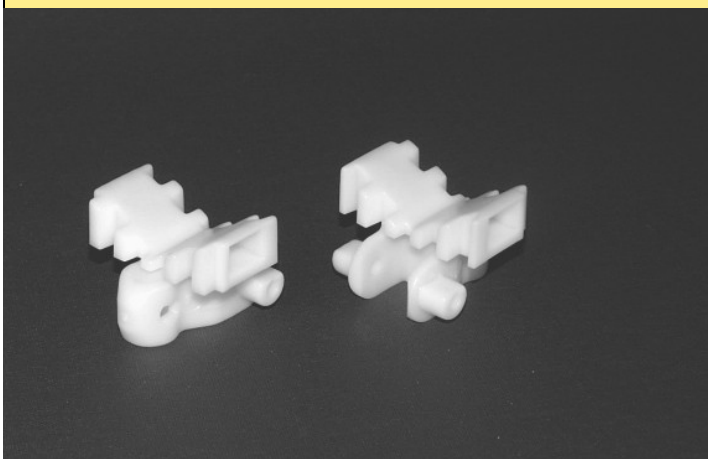
## Cleated chain



Suitable for rollers in slopes up to 45°. Cleated chain consists of flat top links 3903720/3927345 combined with cleated links 3903719/3927343. Also See link type 3903720/3927345.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3903722 PAR	3903719	5056625		16 g	POM A	See page III
	3903720	5056626				
3927346 PAR	3927343	5056627		16 g	POM A GY	See page III
	3927345	5056628				

## Cleated chain (flat top cleats)

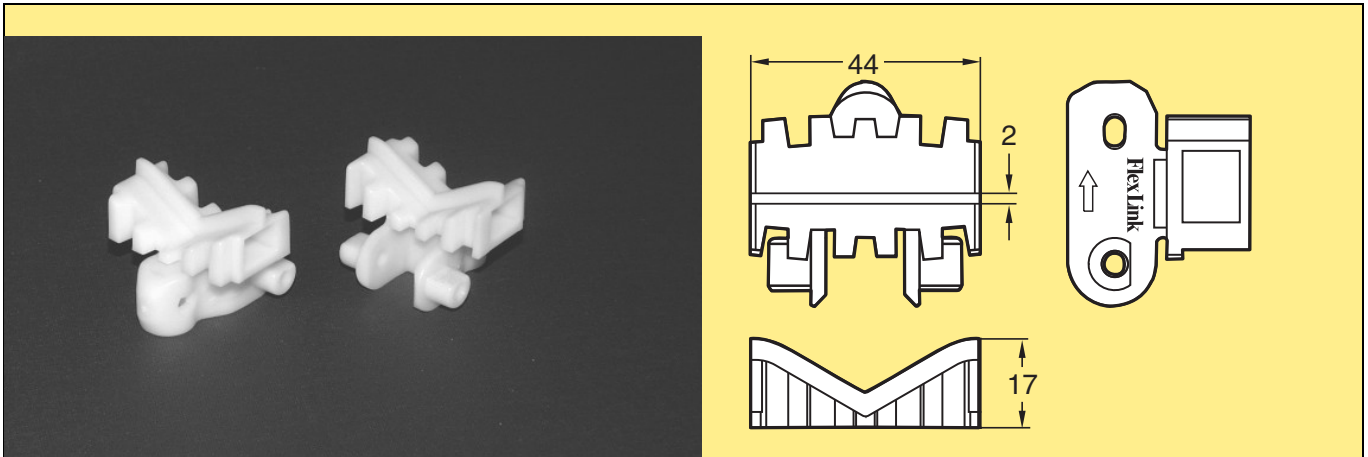


Suitable for rollers. Link 3903720/3927345 often used in slopes in combination with 3903719/3927343.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3903721	3903720	5056626		16 g	POM A	See page III
3927344	3927345	5056628		16 g	POM A GY	See page III



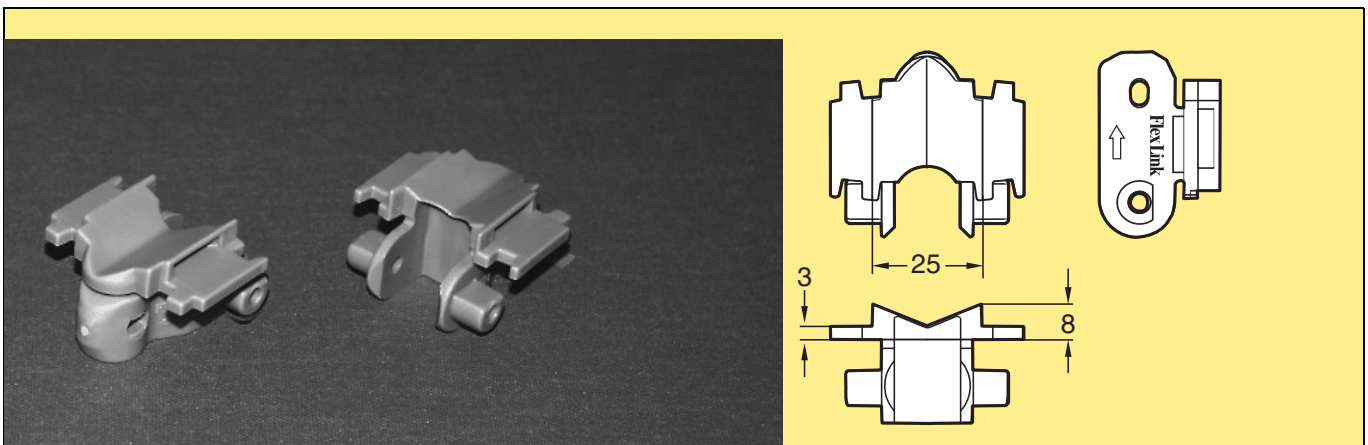
## Cleated chain



Suitable for small rollers in slopes. Cleated chain consists of flat top links 3903720/3927345 combined with cleated links 3904687/3927347. Also See link type 3903720/3927345.

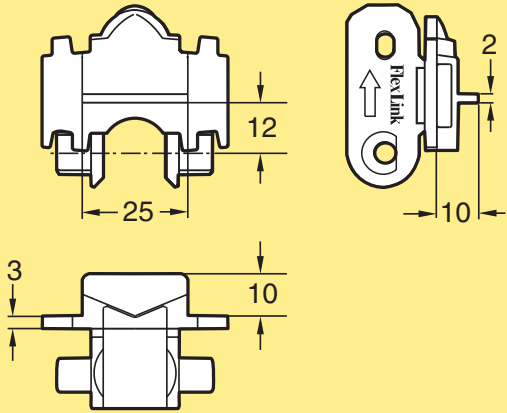
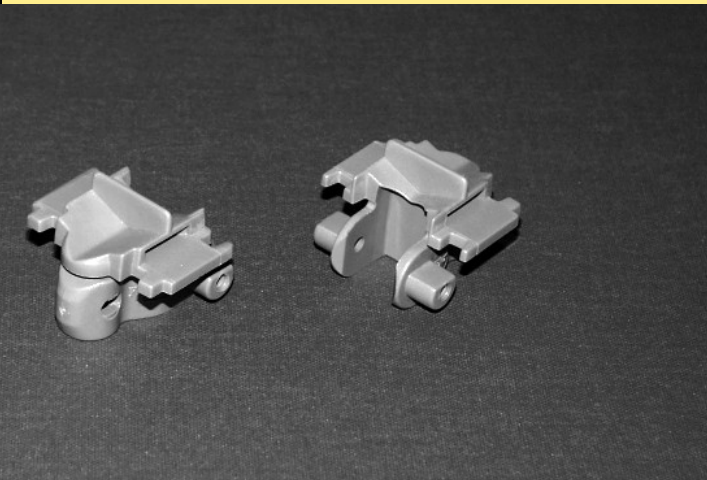
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3904688 PAR	3904687	5056629		16 g	POM A	See page III
	3903720	5056626				
3927348 PAR	3927347	5056630		16 g	POM A GY	See page III
	3927345	5056628				

## Cleated chain (narrow gap)



Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
3905568	3905567	5056631		13 g	POM A	See page III
3927350	3927349	5056632		13 g	POM A GY	See page III

Cleated chain (narrow gap)

<div></div>						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5044112	5044111	5056633		14 g	POM A GY	See page III