


PRE-REQUISITES

SAFETY

PRODUCTS



Recommended tools


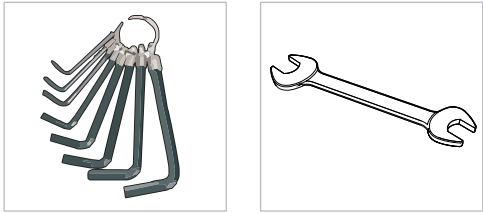


WARNING
The system must not be operated without safety equipment properly mounted.


WARNING
At installation, maintenance and service, make sure the motor is shut off.

WARNING
Pinch Point

CAUTION
Due to heavy weight - 2 person lift, or mechanical lift equipment.

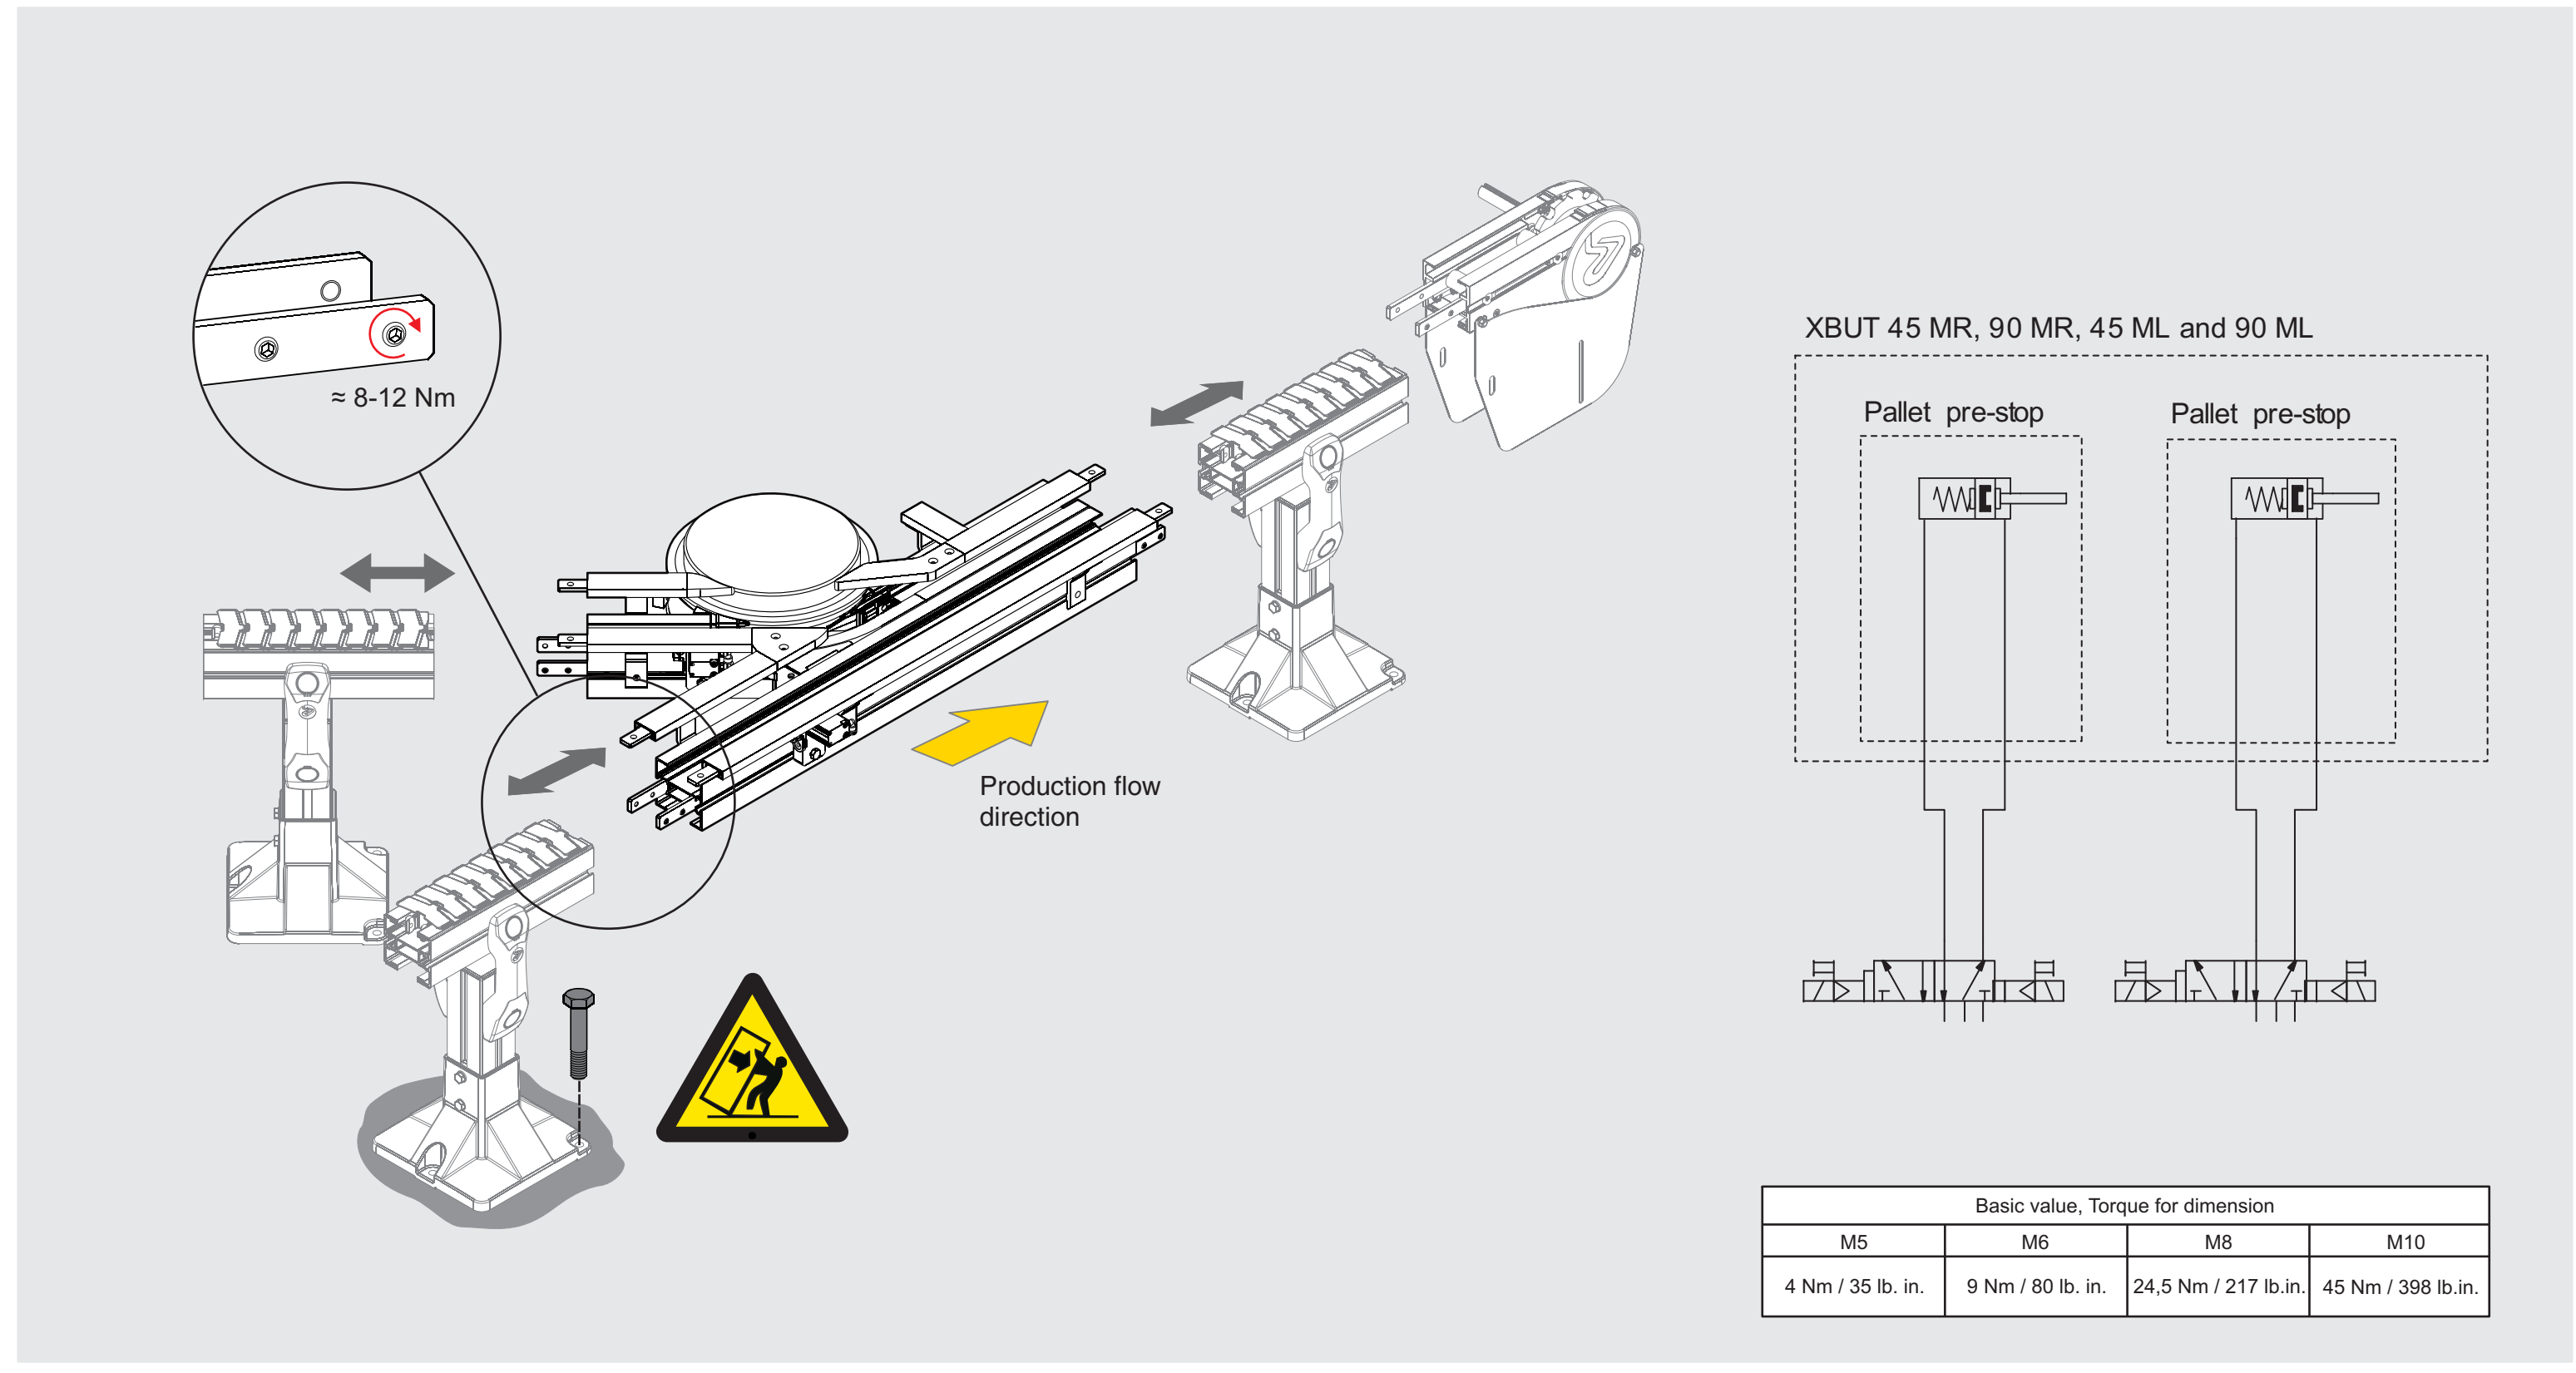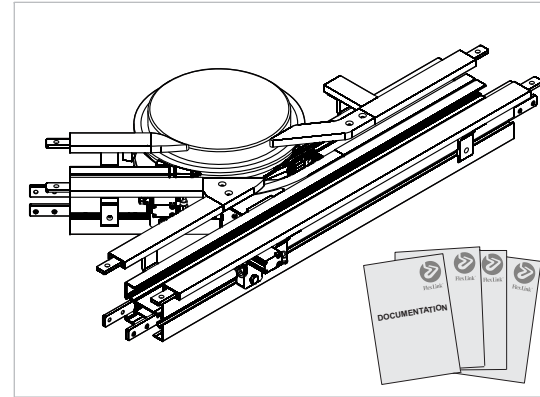

XBUT 45 MR, 90 MR, 45 ML and 90 ML

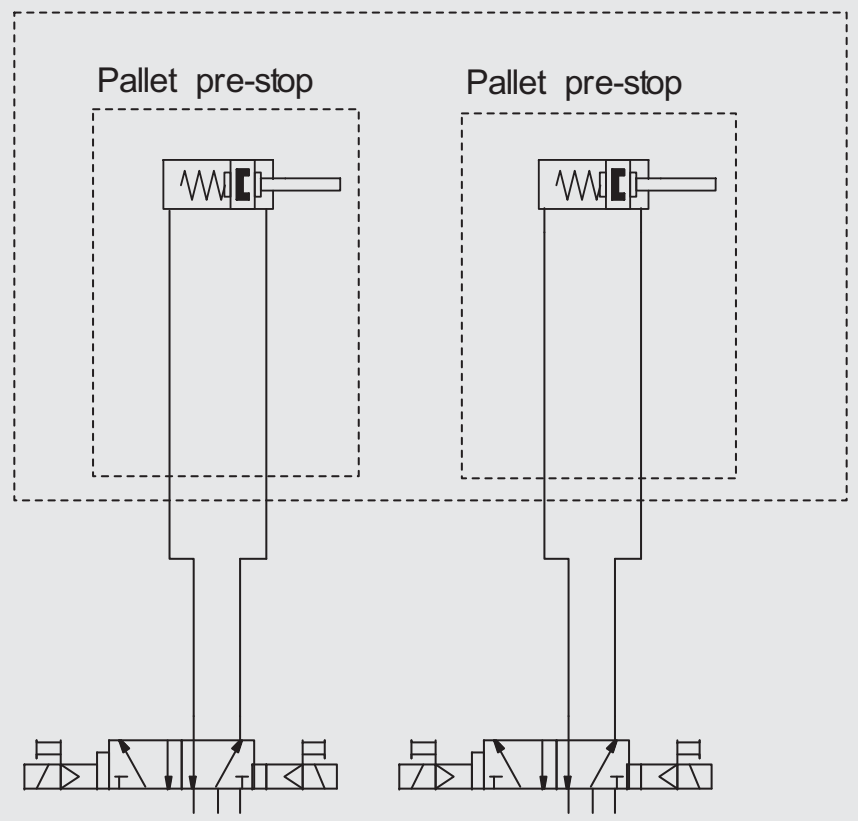

Basic value, Torque for dimension			
M5	M6	M8	M10
4 Nm / 35 lb. in.	9 Nm / 80 lb. in.	24,5 Nm / 217 lb.in.	45 Nm / 398 lb.in.

The illustration may not always correspond exactly to ordered component.


FlexLink Components AB
SE-41550 Göteborg
Sweden

We hereby declare that the following equipment is intended to be incorporated into a FlexLink conveyor system and thereby forming a machine. Operation is prohibited until it has been determined that the machine in which these products are incorporated, has been declared in conformity with the Machinery Directive 2006/42/EC, together with amendments which have entered into force as of the date of issue of this declaration, with particular reference to the essential health and safety requirements in connection with the design, construction and manufacture of the below specified equipment.

- Merge Module, XBUT 45 ML, 45 MR, 90 ML, 90 MR

ASSEMBLY INSTRUCTION

Merge Module
XBUT 45 ML
XBUT 45 MR
XBUT 90 ML
XBUT 90 MR

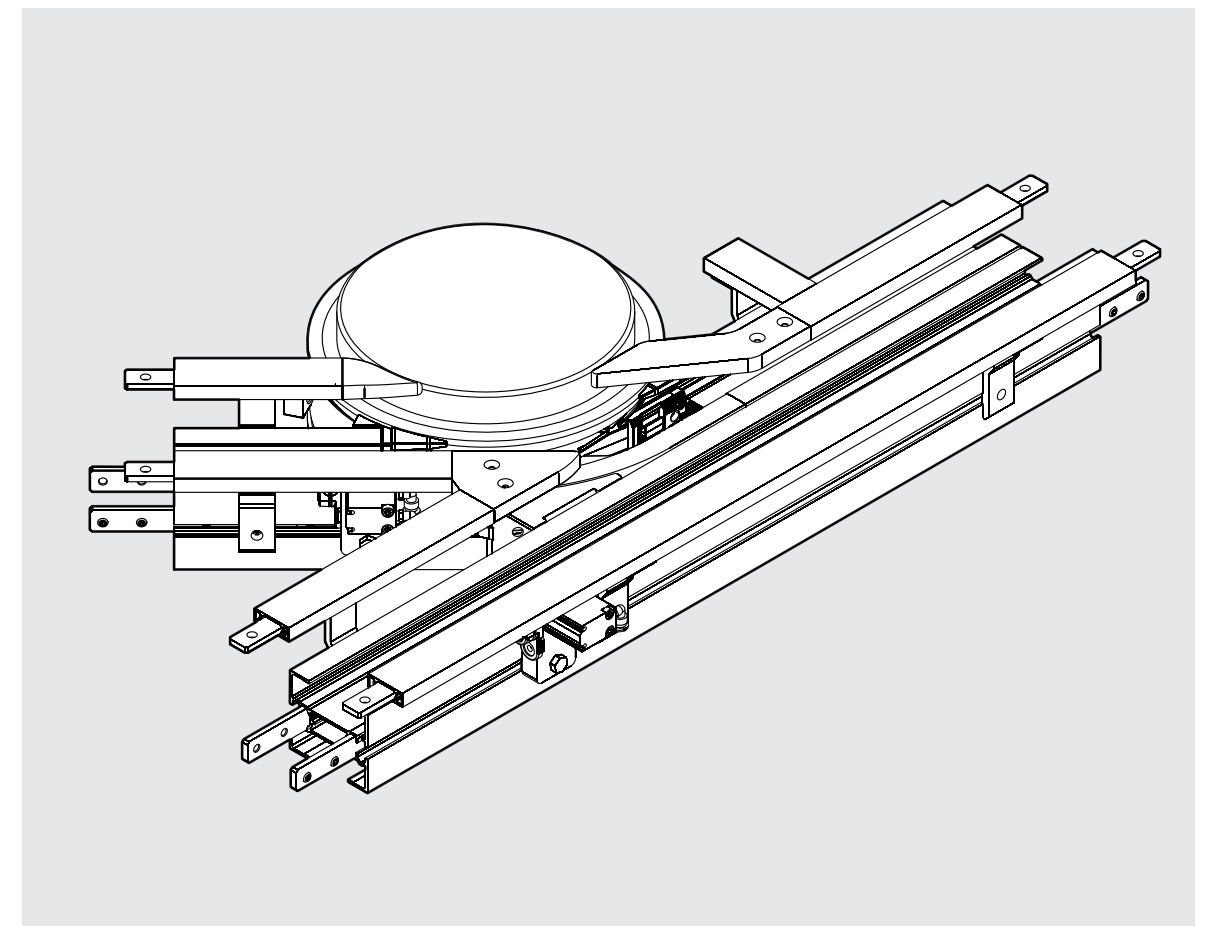

FlexLink Components AB



Svante Anderholm
Chief Operating Officer

Flexlink Components AB



Anders Jonsson
Responsible Technical file

FlexLink Components AB